


VM-10.1Z

10.1" Portable LCD Monitor



- Battery-Powered or Operate on 12VDC
- Ideal for Mobile Applications
- Video Inputs: HD-SDI, HDMI, VGA, Composite (BNC)
- Video Outputs: HD-SDI and Composite (BNC)
- Powder-Coated Steel Enclosure
- 3-Year Warranty
- Approximately 7 Hours Operation with New Fully-Charged Battery

Dimensions:

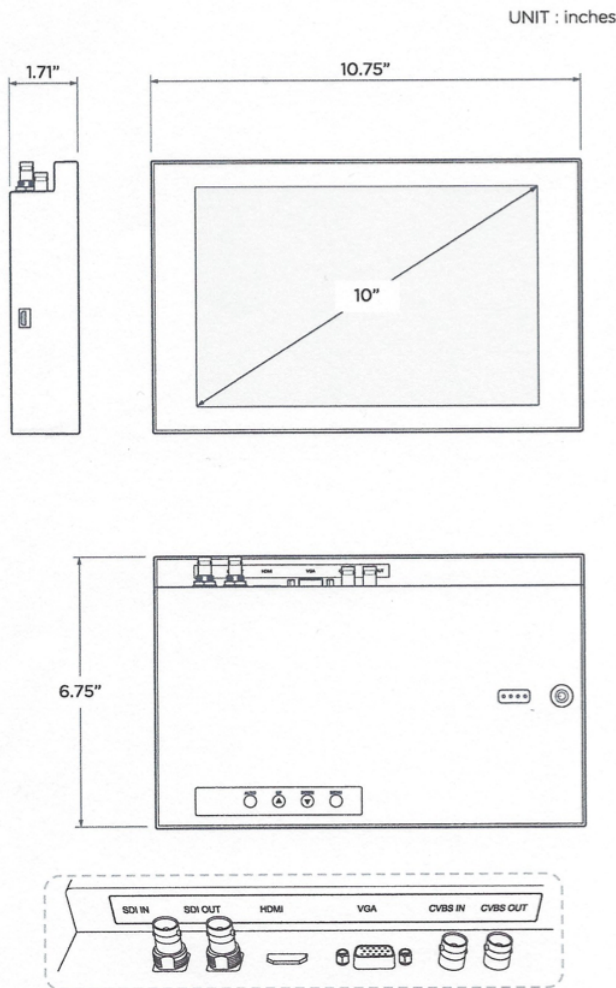

	Specifications
LCD Panel	10.1" TFT LCD
Resolution	1280 x 800
Control	OSD Control Function
Aspect Ratio	16:9 or 4:3 (Selectable)
Display Colors	16M
Brightness	300 nits
Contrast Ratio	700:1
Viewing Angle	140° (H) x 120° (V)
Response Time	12ms
In/Output Impedance	75Ω / Auto Terminating Output
Video Input / Output	1 HD-SDI Input / 1 HD-SDI Output 1 BNC Input / 1 BNC Output 1 VGA Input 1 HDMI Input
Power Requirement	Lithium Ion Battery / DC5V or 12VDC (2.1mm Barrel Plug)
Operating Temperature	35°F to 100°F
Enclosure	Powder-Coated Steel
Dimensions	10.75" (W) x 6.75" (H) x 1.71" (D) (162.05mm x 124.21mm x 74.93mm)
Weight	3.8 lbs. (1.723 kg)
Accessories	USB Charging Cable