



SRMHTWP–10.4 Series

10.4” Sunlight Readable Waterproof Panel–Mount Touch Screen Monitors

- Produce Clear, Sharp Images Even in Direct Bright Sunlight
- 5–Wire Resistive Touch
- 1,500 Nits Brightness
- Stainless Steel Panel–Mount Enclosure
- NEMA 4X / IP65 Waterproof Front Face
- Automatic Ambient Light Sensor
- Auto Re–Start After Power Loss
- Lockable On–Screen Display Controls
- 3 Year Warranty


The SRMHTWP–10.4 Series Sunlight Readable Waterproof Panel–Mount Touch Screens are designed to operate in direct bright sunlight, or in other high ambient–light conditions. They utilize state–of–the–art LED backlights to produce over 1,500 nits of brightness (vs. 250–300 nits for standard monitors). The waterproof panel–mount enclosure enables installation in wash down or wet environments. The Ambient Light Sensor brightens or dims the screen as needed, depending upon ambient light conditions. The SRMHTWP–10.4 Series Sunlight Readable Waterproof Panel–Mount Touch Screens are ideal for use in a wide range of industrial, marine, military, manufacturing, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.

All TRU–Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU–Vu monitor utilizes industrial–grade components and high–end LCD panels not found in retail/consumer–grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3–Year Warranty ensures you of reliable worry–free operation. Visit www.TRU–VuMonitors.com for more details.

Specifications			
MODEL	SRMHXTRWP–10.4C	SRMHXTRWP–10.4H	SRMHTRWP–10.4V
LCD Panel	10.4” Color MVA LCD Panel (LED Backlights)		
Touch Technology	5–Wire Resistive Touch		
Touch Interface	USB		
Resolution	1024 x 768 (XGA)		800 x 600 (SVGA)
Viewable Area	8.31” (W) x 6.24” (H) (211.2 x 158.4 mm)		
Pixel Pitch	0.2055 mm		
Display Colors	16.2 M		
Aspect Ratio	4:3		
Brightness	1,500 nits		
Contrast Ratio	3,000:1		
Response Time	15 msec Trf		
Viewing Angle	178° (H) x 178° (W)		
Control	OSD (On–Screen Display) via Rear Panel Pushbuttons		
Video Inputs	VGA & DVI	VGA & HDMI	VGA
Power Requirement	12–24VDC		
Power Consumption	17W		13W
Enclosure	Stainless Steel Panel–Mount (Rear Clamp)		
Rating	NEMA 4X / IP65 Front Face		
Operating Temperature	–22 °F to +176 °F (–30 °C to +80 °C)		
Humidity	8–90%RH		
Shock	50 G (20 msec, ½ sine)		
Vibration	1.5G RMS 10–200 HZ 30 mins/axis (X,Y,Z)		
Dimensions	12.57” (W) x 9.87 (H) (319.20 x 250.70 mm)		
Warranty	3 Years		

SRMHTWP-10.4 Series 10.4" Sunlight Readable Waterproof Panel-Mount Touch Screen Monitors

Dimensions: (mm)

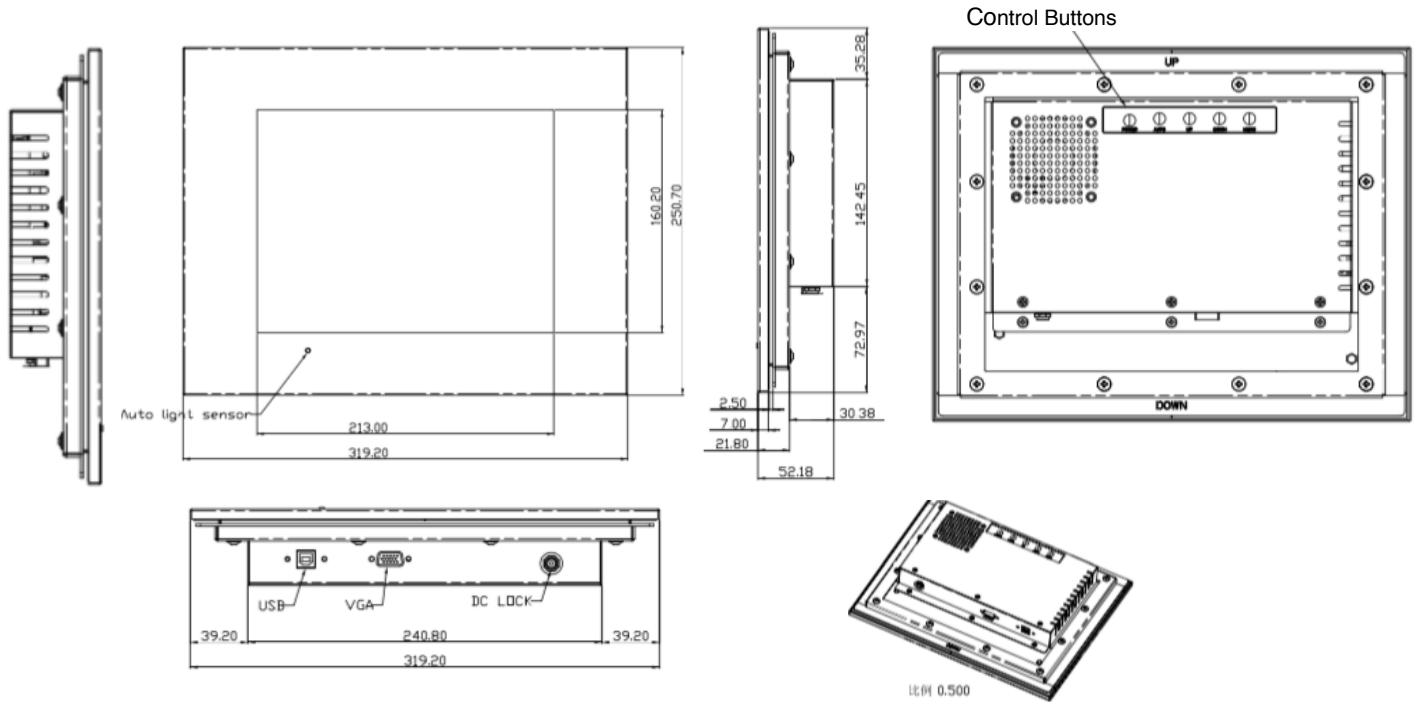

Standard Accessories:

- VGA Cable
- Locking Power Pigtail

Available Options:

- DVI Input
- HD - SDI Input
- Private Label
- Other Customer - Specific Modifications