

SRMW-10.4S

10.4" Sunlight Readable Monitors (Waterproof Face)



- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 1,000 nits Brightness
- **NEMA 4/IP65 Waterproof Front Face**
- Protective Anti-Glare Glass
- LED Backlights
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Lockable OSD (On-Screen Display) Controls
- Low EMI Noise
- 3 Year Warranty

The SRMW-10.4S Sunlight Readable LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. SRMW-10.4S Sunlight Readable monitors will eliminate the need for sun-shields, squinting or straining to see washed-out images. The waterproof front face will prevent damage due to spray, saltwater, etc.

The SRMW-10.4S Sunlight Readable LCD monitors are built with industrial-grade components, and receive our exclusive **TRU-Tuff** treatment. The **TRU-Tuff** process includes: RTV silicone on all connections and critical components; all wires are dressed, tie-wrapped and secured; and ThreadLock on all screws. This, plus the rugged powder-coated steel enclosure, ensures maximum shock and vibration resistance. These monitors are ideal for a wide range of demanding applications including industrial, military, law enforcement, aviation, marine, inspection, surveying, cranes, oceanic, entertainment and transportation.


Specifications

MODEL	SRMW-10.4S
LCD Panel	10.4" LCD; LED Backlights
Resolution	800 x 600 (SVGA)
Viewable Area	8.3" (W) x 6.2" (H) (211.2 x 158.4 mm)
Pixel Pitch	0.264 (H) x 0.264 (V)
Display Colors	16.2M
Aspect Ratio	4:3
Brightness	1,000 nits
Contrast Ratio	700:1
Viewing Angle	160° (H) x 140° (V)
Response Time	15 msec
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons
Video Inputs	VGA, S-Video, Composite (BNC),NTSC/PAL, Auto-Recognition
Power Requirement	12 VDC (2.1mm Barrel Plug); 90-240 VAC via Included Power Brick
Power Consumption	13W (1.08 A @ 12 VDC)
Enclosure	Powder-Coated Steel; IP65 / NEMA 4 Waterproof Front Face
Mounting	75 x 75 mm Rear VESA Mount Holes
Operating Temperature	-31° to +185° F (-35° to +85° C)
Shock	50G, 20ms, Half-sine wave
Vibration	1.5G (10-200 Hz, P-P) 30 mins./axis (X,Y,Z)
Dimensions	10.33" (W) x 8.08" (H) x 1.59" (D) (262.4 (W) x 205.4 (H) x 40.4 (D) mm)
Weight	4.1 lbs. (1.9 kg)
Warranty	3 Years

SRMW-10.4S

10.4" Sunlight Readable Monitor (Waterproof Face)

Dimensions:

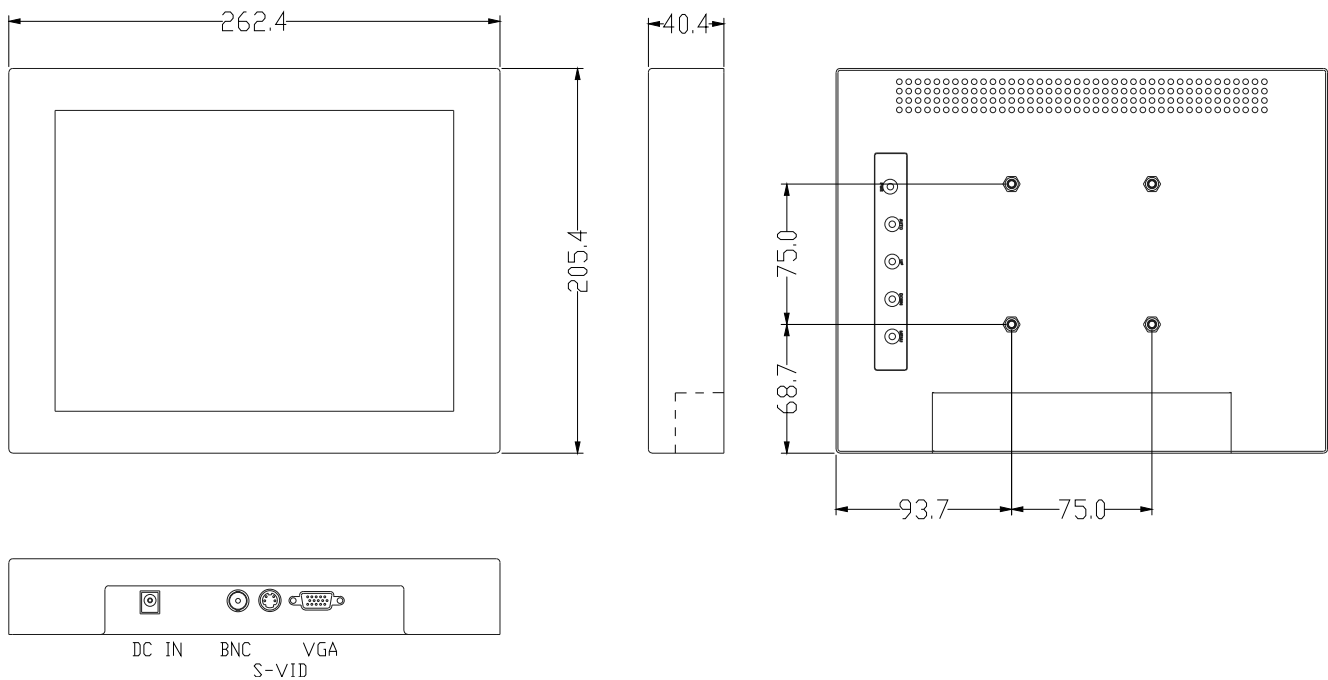

Standard Accessories:

- 90-240 VAC Power Brick

Available Options:

- Completely Waterproof NEMA 4X Enclosure
- Open-Frame Configuration
- Private Label
- Wall Mount or Tabletop Bracket
- Other Customer - Specific Modifications