



SRMHT-15 Series

15" Sunlight-Readable Touch Screen Monitors

- Produce Clear, Sharp Images Even in Direct Bright Sunlight
- 5-Wire Resistive Touch or Capacitive Touch
- 1,500 –1,700 Nits Brightness
- Auto Re-Start After Power Loss
- **TRU-Tuff** Treatment Ensures Maximum Shock & Vibration Resistance
- Lockable On-Screen Display Controls
- 3-Year Warranty


The SRMHT-15 Series Sunlight Readable Touch Screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,500 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRMHT-15 Series Sunlight Readable Touch Screens are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.

All **TRU-Vu** industrial LCD monitors are specifically designed for use in demanding applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

		Specifications		
MODEL	SRMHTR-15H-24	SRMHTR-15V	SRMHTR-15C	SRMHTR-15C-17
LCD Panel	15" Color LCD; LED Backlights			
Touch Technology	5-Wire Resistive Touch			Capacitive
Touch Interface	USB			
Resolution	1024 x 768 (XGA)			
Viewable Area	11.97" (W) x 8.98" (H) (304.13 x 228.10 mm)			
Pixel Pitch	0.297mm x 0.297mm			
Display Colors	16.2 M			
Aspect Ratio	4:3			
Brightness	1,500 nits			1,700 nits
Contrast Ratio	700:1			
Viewing Angle	170° (H) x 160° (V)			
Response Time	8 msec Trf			
Control	OSD (On-Screen Display) via Front Panel Pushbuttons			
Video Inputs	VGA & HDMI	VGA	VGA, DVI	
Power Requirement	12-24 VDC	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Brick		
Power Consumption	48 Watts			
Enclosure	ABS			
Mounting	Included Base or 75x75mm VESA Hole Pattern			
Operating Temperature	-22° TO +185°F (-30° TO +85°C)	+32° to +140° F (0° to +60° C)		
Humidity	8-90%RH			
Shock	50 G (20 msec, ½ sine)			
Vibration	1.5G RMS 10-200 HZ			
Dimensions	13.66" (W) x 10.87" (H) x 1.78" (D) (347 x 276 x 45.20 mm)			
Weight	4.87 lb (2.21 kg)			

SRMHT-15 Series 15" Sunlight Readable Touch Screen Monitors

Dimensions:

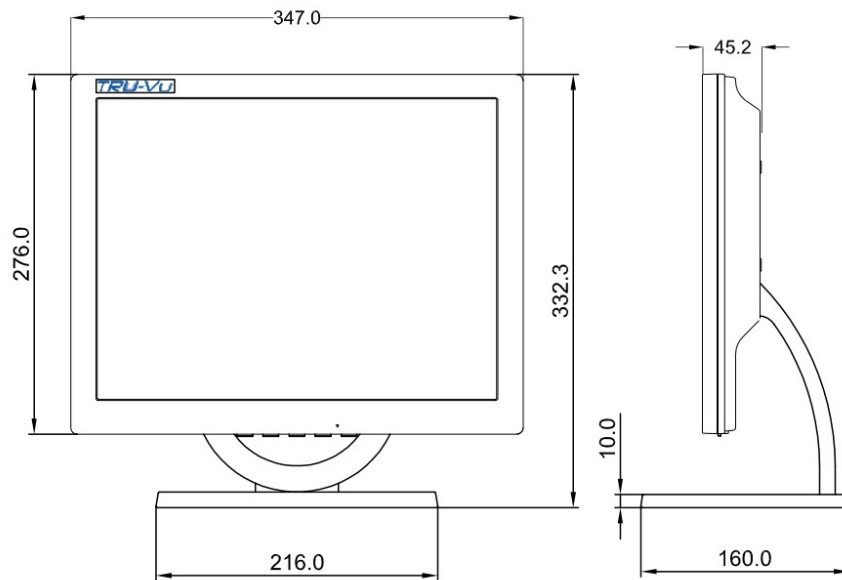

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base

Available Options:

- 1,700 Nits LCD Panel
- Optical Bonding
- Waterproof Stainless Steel Enclosure
- -30° to +85°C Operating Temperature
- Protective Anti-Reflective Glass
- Speakers
- Ambient Light Sensor
- Panel Mount
- 11-36 VDC Operation
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications