



### VMT-15 Series

#### 15" Touch Screen LCD Monitors

- 5-Wire Resistive, Capacitive or S.A.W. Touch Screen
- High Resolution: 1024 x 768 (XGA)
- LED Backlights
- 700:1 Contrast Ratio
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VMT-15 Series touch screen monitors are available with 5-Wire Resistive, Surface Capacitive or S.A.W. touch screen. The image quality is exceptionally clear and bright; the contact activation point is extremely accurate, and features a USB touch interface. An extensive list of OEM options enables you to customize the VMT-15 Series touch screens to meet your exact needs. These are available with 250 nits or 350 nits brightness.


TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilized industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

	Specifications			
MODEL	VMTR-15C-24	VMLTR-15CL	VMLTC-15V	VMLTS-15CL
LCD Panel	15" Color LCD; LED Backlights			
Touch Screen Type	5-Wire Resistive Touch		Surface Capacitive	S.A.W.
Touch Interface	USB			
Resolution	1024 x 768 (XGA)			
Viewing Area	11.97" (W) x 8.98" (H) (304.128 x 228.096 mm)			
Pixel Pitch	0.297mm			
Display Colors	16.2 M			
Aspect Ratio	4:3			
Brightness	350 nits	250 nits		
Contrast Ratio	700:1			
Viewing Angle	170° (H) x 160° (V)			
Response Time	8 msec (Trf)			
Control	OSD (On-Screen Display) via Front Panel Pushbuttons			
Video Input	VGA, DVI		VGA	VGA, DVI
Audio	Rear Speakers			
Power Requirement	12-24 VDC / 90-240 VAC	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Brick		
Power Consumption	25 Watts			
Enclosure	ABS			
Mounting	Included Base or 75x75mm Rear VESA Mount Holes			
Operating Temperature	+32° to 149° F (0° to +65° C)			
Humidity	8-90% RH			
Shock	50 G (20 msec, ½ sine)			
Vibration	1.5G RMS 10-200 HZ			
Approvals	UL/cUL, FCC, CE, RoHS			
Dimensions	13.66" (W) X 10.87" (H) x 1.78" (D) (347 x 276 x 45.20 mm)			
Weight	5.64 lbs. / 2.56 kg			
Warranty	3 Years			

## VMT-15 Series

15" Touch Screen LCD Monitors

### Dimensions:

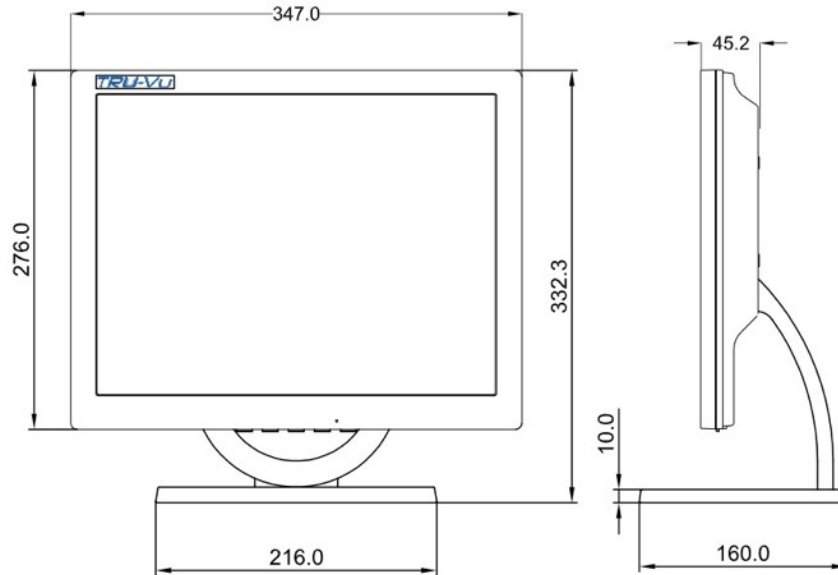

### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base
- Audio Cable
- DVI Cable
- USB Cable

### Available Options:

- HDMI & DisplayPort Inputs
- NEMA 4X Waterproof Stainless Steel Enclosure
- Powder-Coated Steel Enclosure
- Panel-Mount
- Open-Frame Configuration
- Private Label
- Wall Mount Bracket
- Other Customer - Specific Modifications