



### VMT-15 Series

#### 15" Touch Screen LCD Monitors

- 5-Wire Resistive Touch Screen
- High Resolution: 1024 x 768 (XGA)
- LED Backlights
- 250 or 350 Nits Brightness
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VMT-15 Series touch screen monitors are available with 5-Wire Resistive, Surface Capacitive or S.A.W. touch screen. The image quality is exceptionally clear and bright; the contact activation point is extremely accurate, and features a USB touch interface. An extensive list of OEM options enables you to customize the VMT-15 Series touch screens to meet your exact needs. These are available with 250 nits or 350 nits brightness.


TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilized industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

	Specifications		
MODEL	VMTR-15C-24	VMTR-15C	VMLTR-15CL
LCD Panel	15" Color LCD; LED Backlights		
Touch Screen Type	5-Wire Resistive Touch		
Touch Interface	USB		
Resolution	1024 x 768 (XGA)		
Viewing Area	11.97" (W) x 8.98" (H) (304.128 x 228.096 mm)		
Pixel Pitch	0.297mm		
Display Colors	16.2 M		
Aspect Ratio	4:3		
Brightness	350 nits		250 nits
Contrast Ratio	700:1		
Viewing Angle	170° (H) x 160° (V)		
Response Time	8 msec (Trf)		
Control	OSD (On-Screen Display) via Front Panel Pushbuttons		
Video Input	VGA, DVI		
Audio	Rear Speakers		
Power Requirement	12-24 VDC	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Brick	
Power Consumption	25 Watts		
Enclosure	ABS		
Mounting	75 X 75mm Rear VESA Holes		Included Base or 75x75mm Rear VESA Mount Holes
Operating Temperature	+32° to 149° F (0° to +65° C)		
Humidity	8-90% RH		
Shock	50 G (20 msec, ½ sine)		
Vibration	1.5G RMS 10-200 HZ		
Approvals	RoHS	UL/cUL,FCC,RoHS	
Dimensions	13.66" (W) X 10.87" (H) x 1.78" (D) (347 x 276 x 45.20 mm)		
Weight	5.64 lb / 2.56 kg		
Warranty	3 Years		

## VMT-15 Series

15" Touch Screen LCD Monitors

### Dimensions:

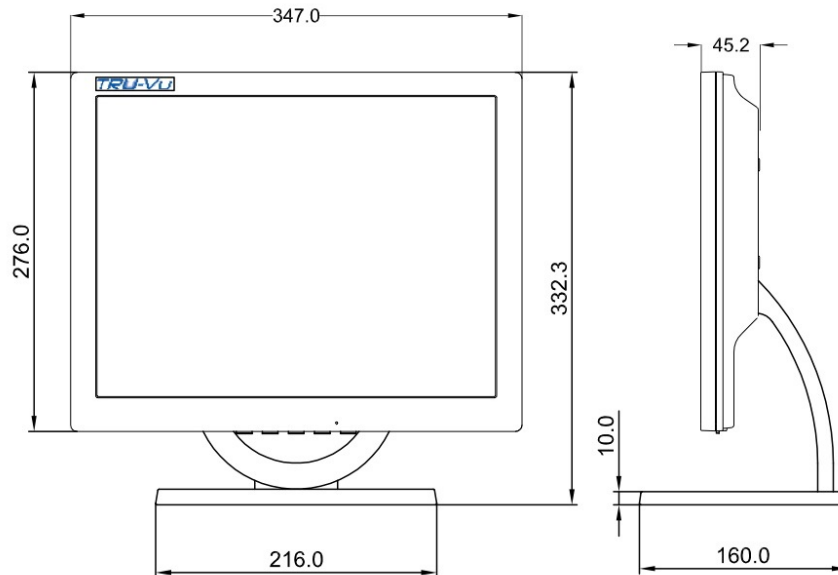

### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base (VMLTR-15CL Only)
- Audio Cable
- DVI Cable
- USB Cable

### Available Options:

- HDMI & DisplayPort Inputs
- NEMA 4X Waterproof Stainless Steel Enclosure
- Powder-Coated Steel Enclosure
- Surface Capacitive Touch Screen
- S.A.W. Touch Screen
- Panel-Mount
- Open-Frame Configuration
- Private Label
- Wall Mount Bracket