



VMWT-17C Series

17" Waterproof Industrial Touch Screen Monitor

- 17" 5-Wire Resistive or Capacitive Touch Screen
- NEMA 4 / 4X Waterproof Enclosures
- Steel or Stainless Steel Enclosure
- Ideal For Manufacturing and Food Processing Plants
- High Resolution: 1280 x 1024 (SXGA)
- Lockable On-Screen Display Controls
- Can Be Customized to Meet Your Needs
- Optional Panel-Mount Version
- 3-Year Warranty

The VMWTR-17 Series are industrial-grade 17" touch screens in waterproof enclosures. The 5-wire resistive touch screen can be activated via almost any object – gloved finger, stylus, pointer, etc. They are available with a powder-coated steel or stainless steel enclosure, making them ideal for washdown environments in manufacturing or food processing plants.


TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.

| | Specifications | | | |
|------------------------|---|--------------------|--|--|
| MODEL | VMWTR-17C-24 | VMWTR-17C-SS-24 | | |
| LCD Panel | 17" Color LCD; LED Backlights | | | |
| Touch Screen Type | 5-Wire Resistive Touch | | | |
| Touch Screen Interface | USB | | | |
| Resolution | 1280 x 1024 (SXGA) | | | |
| Viewable Area | 13.30" (W) x 10.64" (H) (337.92 x 270.34 mm) | | | |
| Pixel Pitch | 0.264mm | | | |
| Display Colors | 16.7M | | | |
| Aspect Ratio | 4:3 (5:4) | | | |
| Brightness | 250 nits | | | |
| Contrast Ratio | 1,000:1 | | | |
| Viewing Angle | 170° (H) x 160° (V) | | | |
| Response Time | 5 msec | | | |
| Control | OSD via Rear Panel Pushbuttons | | | |
| Video Inputs | VGA & DVI | | | |
| Power Requirement | 12-24 VDC | | | |
| Enclosure | Powder-Coated Steel | Stainless Steel | | |
| Enclosure Rating | NEMA 4 Waterproof | NEMA 4X Waterproof | | |
| Mounting | 100 x 100 Rear VESA Mount Holes | | | |
| Operating Temperature | +32° to +122° F (0 to +50° C) | | | |
| Humidity | 5 – 90% RH | | | |
| Shock | 50 G (20 msec,1/2 sine) | | | |
| Vibration | 1.5G (10-200 Hz P-P) | | | |
| Dimensions | 16.32" W x 12.95" H x 2.87" D (414.5 x 329 x 73 mm) | | | |
| Included Accessories | VGA Cable, Power Pigtail Wire | | | |

VMWT-17C Series

17" Waterproof Industrial Touch Screen Monitor

Dimensions:

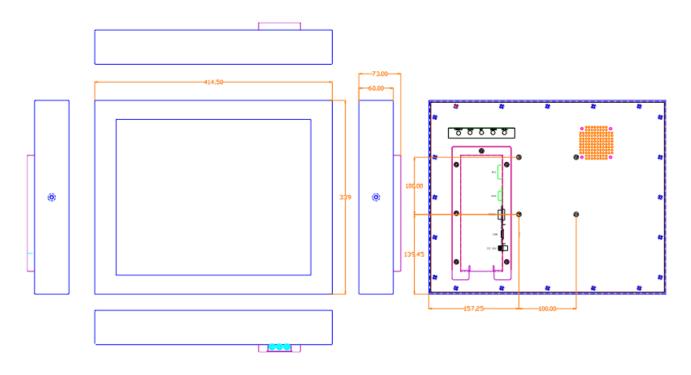

Standard Accessories:

- VGA Cable
- DC Power Pigtail

Available Options:

- 120VAC Power
- Panel Mount Enclosure
- Capacitive Touch Screen
- Private-Label
- Other Customer-Specific Modifications

| TPI | I-VI | / Mo | nitors. | Inc. |
|-----|------|------|---------|------|