

### ZBMT-18.5R

#### 18.5" HD Multi-Touch Touch Screen LCD Monitor



- Projected Capacitive Touch Screen
- Can Be Activated Via Exposed Finger, and Surgical or Thin Cotton Gloves
- Zero-Bezel, Seamless, All Glass Front Face
- Sleek Design, Easy to Clean
- HD Resolution: 1366 x 768 (720p)
- Dual Built-in Speakers (Rear)
- Auto Re-Start After Power Loss
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The ZBMT-18.5R Projected Capacitive, multi-touch, zero-bezel touch screen monitors offer the latest in LCD touch screen technology. The projected capacitive touch technology can be activated via an exposed finger (like standard capacitive touch), and also a finger inside a surgical glove or thin cotton glove. The multi-touch capability allows simultaneous dual finger operation for selecting, zoom, flick and other functions. It is also unaffected by dirt, grease or moisture on the glass surface. The sleek all-glass, seamless, zero-bezel front face is stylish as well as functional; it is easy to clean and eliminates the potential for contamination build-up under the bezel. The thin black housing finishes off the elegant look, and is perfect for healthcare, kiosk, hospitality and other applications.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.


### Specifications

Specifications	
LCD Panel	18.5" TFT Color LCD; LED Backlights
Touch Screen Type	Projected Capacitive Touch
Touch Interface	USB
Display Resolution	1366 x 768 (WXGA)
Viewable Area	16.13" x 9.07" (409.8 x 230.4 mm)
Pixel Pitch	0.300mm
Display Colors	16.2 M
Aspect Ratio	16:9
Brightness	250 nits
Contrast Ratio	1,000:1
Viewing Angle	170° (H) x 160° (V)
Response Time	5 ms Trf
Control	OSD (On-Screen Display) via Pushbuttons (Lockable)
Video Inputs	VGA, HDMI, DisplayPort
Power Requirement	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Brick
Power Consumption	16W
Enclosure	ABS, Zero-Bezel Front Face
Mounting	Tabletop Base or 100 x 100 mm Rear VESA Mount Holes
Operating Temperature	32° to 122° F (0 to 50° C)
Dimensions	17.89" (W) x 10.77" (H) x 2.04" (D) (453.1 x 273.69 x 51.8 mm)
Weight	9.8 lbs. (4.44kg)

## ZBMT-18.5R

18.5" HD Multi-Touch Touch Screen LCD Monitor

### Dimensions:

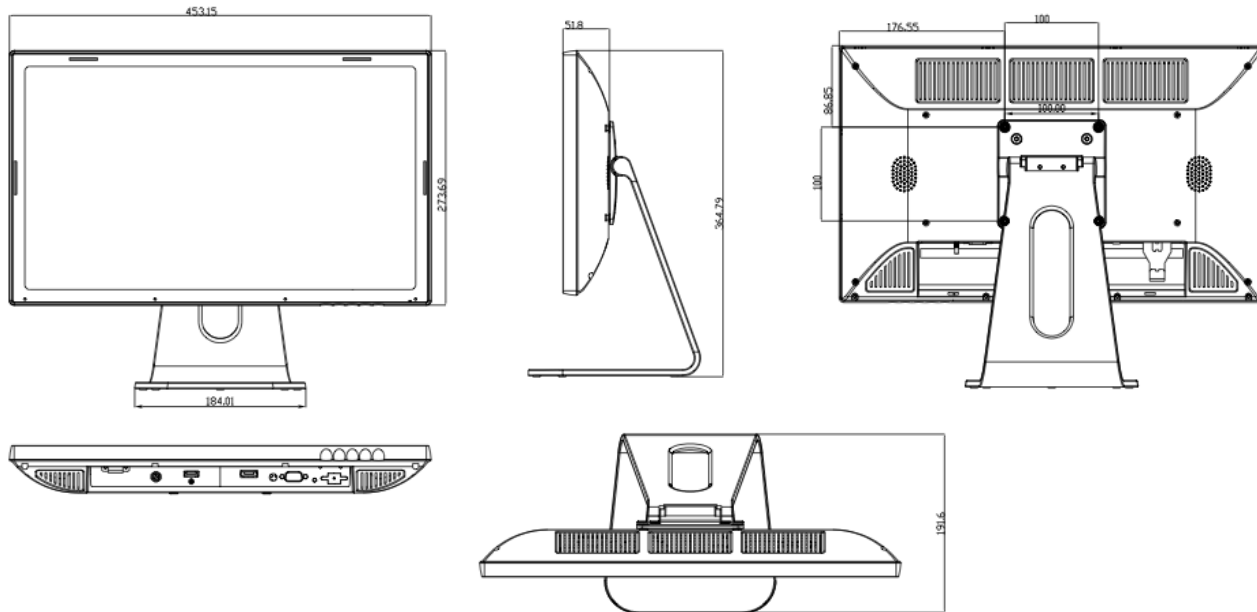

### Standard Accessories:

- 90-260 VAC Power Brick
- Tabletop Stand
- VGA Cable
- USB Cable
- Audio Cable

### Available Options:

- HDMI-to-DVI Adapter
- Protective/Anti-Reflective Glass Screen
- Private Label