



MM-21.5 Series 21.5" Medical-Grade LCD Monitor

- 21.5" Surgical-Grade LCD Display
- Meets UL 60601, 3rd Edition
- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- Video Inputs: VGA, DVI, HDMI, DisplayPort
- Lockable On-Screen Display Controls
- 3-Year Warranty


The MM-21.5 Series Medical-Grade monitors conform to the latest UL 60601-1 (3rd Edition) regulations. They are ideal for hospital OR/ER/ICU, patient monitoring and information, telemedicine, endoscopy and other medical applications. The MM-21.5 Series monitors feature full HD resolution, and provide excellent image quality, color fidelity and image contrast, enabling surgeons to make better and faster decisions with maximum accuracy. The robust yet lightweight design and VESA-compliant rear mounting holes enable flexible mounting options for wall mounts, booms and mobile carts. The MM-21.5 Series monitors are designed to operate 24/7, and are backed by our full 3-year warranty.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance, greater durability, and a longer life. Visit www.TRU-VuMonitors.com for more details.

| Specifications | | |
|-----------------------------|--|------------------------|
| MODEL | MM-21.5C | MM-21.5R |
| LCD Panel | 21.5" Color LCD (MVA Type) | |
| Display Resolution | 1920 x 1080 (1080p/60 Full HD) | |
| Viewable Area | 18.76" x 10.55" (476.64 x 268.11 mm) | |
| Pixel Pitch | 0.248mm | |
| Display Colors | 16.7 M | |
| Aspect Ratio | 16:9 | |
| Brightness | 300 nits | |
| Contrast Ratio | 5,000:1 | |
| Viewing Angle | 178° (H) x 178° (V) | |
| Response Time | 16 ms Trf | |
| Control | OSD (On-Screen Display) via Pushbuttons | |
| Video Inputs | VGA & DVI-D | VGA, HDMI, DisplayPort |
| Audio | Optional Dual Rear Speakers | |
| Power Requirement | 90-240 VAC with Green-Dot Power Cord (Also available with External Medical-Grade Power Supply) | |
| Power Consumption | 24W | |
| Enclosure | ABS (White) | |
| Mounting | Included Tabletop Base or Via 100x100mm Rear VESA Mount Holes | |
| Operating Temp/ Humidity | 32 to 122°F (0-50°C); 5-90% Non-Condensing | |
| Shock | 50G, Half-sine Wave, 20ms, X/Y/Z | |
| Vibration | Acceleration: 1.5 Grms; Random Wave; 10-200Hz; 30 mins Per Axis (X,Y,Z) | |
| Dimensions | 20.68" W x 12.6" H x 2.2" D (525.3 x 320.3 x 55.80 mm) | |
| Weight | 8.31 lbs. (3.77 kg) | |

MM-21.5 Series 21.5" Medical-Grade LCD Monitor

Dimensions:

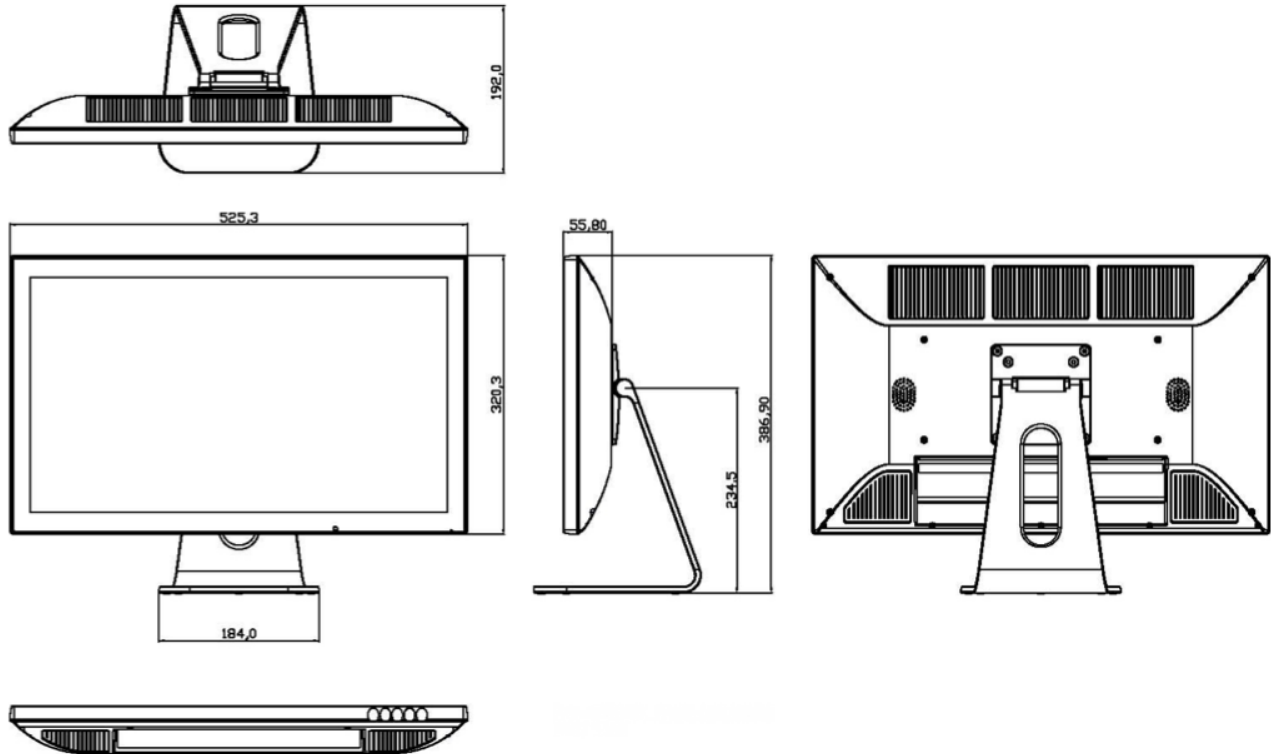

Standard Accessories:

- Hospital-Grade Green-Dot Power Cord
- VGA Cable
- DVI Cable ("C" Version only)
- HDMI Cable ("R" Version only)

Available Options:

- Tabletop Base
- External Medical-Grade Power Supply
- Speakers
- Touch Screen
- DICOM Part 14 GSDF Calibration
- Private Label
- Other Customer-Specific Modifications