



MM-21.5 Series 21.5" Medical-Grade LCD Monitor

- 21.5" Surgical-Grade LCD Display
- Meets UL 60601, 3rd Edition
- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- Video Inputs: VGA, DVI, HDMI, DisplayPort
- Lockable On-Screen Display Controls
- 3-Year Warranty


The MM-21.5 Series Medical-Grade monitors conform to the latest UL 60601-1 (3rd Edition) regulations. They are ideal for hospital OR/ER/ICU, patient monitoring and information, telemedicine, endoscopy and other medical applications. The MM-21.5 Series monitors feature full HD resolution, and provide excellent image quality, color fidelity and image contrast, enabling surgeons to make better and faster decisions with maximum accuracy. The robust yet lightweight design and VESA-compliant rear mounting holes enable flexible mounting options for wall mounts, booms and mobile carts. The MM-21.5 Series monitors are designed to operate 24/7, and are backed by our full 3-year warranty.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance, greater durability, and a longer life. Visit www.TRU-VuMonitors.com for more details.

Specifications			
MODEL	MM-21.5C	MM-21.5R	MM-21.5R-X
LCD Panel	21.5" Color LCD (MVA Type)		
Display	1920 x 1080 (1080p/60 Full HD)		
Viewable Area	18.76" x 10.55" (476.64 x 268.11 mm)		
Pixel Pitch	0.248mm		
Display Colors	16.7 M		
Aspect Ratio	16:9		
Brightness	300 nits		
Contrast Ratio	5,000:1		
Viewing Angle	178° (H) x 178° (V)		
Response Time	16 ms Trf		
Control	OSD (On-Screen Display) via Pushbuttons		
Video Inputs	VGA & DVI-D	VGA, HDMI, DisplayPort	
Audio	Optional Dual Rear Speakers		
Power Requirement	90-240 VAC with Green-Dot Power Cord	90-240 VAC (with External Medical-Grade Power Supply)	
Power	24W		
Enclosure	ABS (White)		
Mounting	Included Tabletop Base or Via 100x100mm Rear VESA Mount Holes		
Operating Temp/ Humidity	32 to 122°F (0-50°C); 5-90% Non-Condensing		
Shock	50G, Half-sine Wave, 20ms, X/Y/Z		
Vibration	Acceleration: 1.5 Grms; Random Wave; 10-200Hz; 30 mins Per Axis (X,Y,Z)		
Dimensions	20.68" W x 12.6" H x 2.2" D (525.3 x 320.3 x 55.80 mm)		
Weight	8.31 lbs. (3.77 kg)		
Warranty	3-Years		

MM-21.5 Series 21.5" Medical-Grade LCD Monitor

Dimensions:

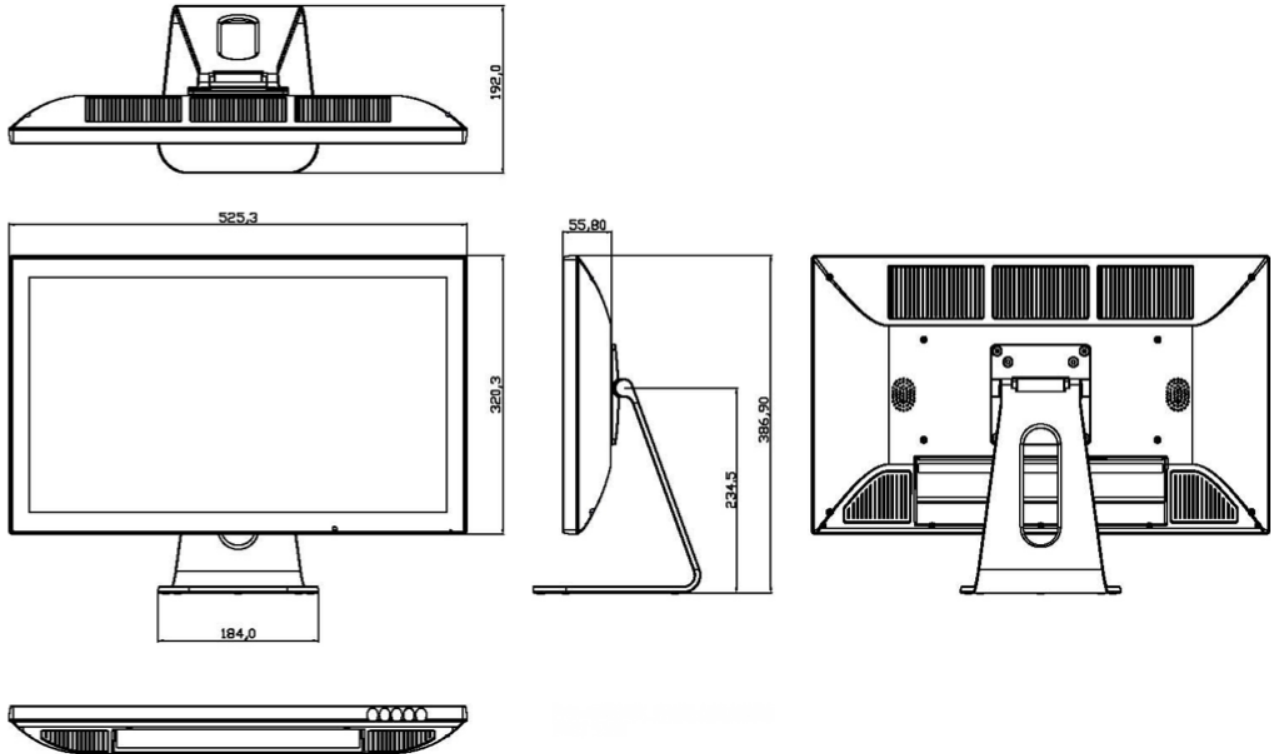

Standard Accessories:

- Hospital-Grade Green-Dot Power Cord
- VGA Cable
- DVI Cable ("C" Version only)
- HDMI Cable ("R" Version only)

Available Options:

- Tabletop Base
- Speakers
- Touch Screen
- DICOM Part 14 GSDF Calibration
- Private Label
- Other Customer-Specific Modifications