

### SRMW-21.5R-SS

#### 21.5" Outdoor Sunlight Readable LCD Monitor



- 1,000 nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- NEMA 4X Water Resistant Stainless Steel Enclosure
- Video Inputs: VGA, HDMI, DisplayPort
- Anti-Reflective Glass
- Auto Re-Start After Power Loss
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Can Be Customized To Meet Your Needs
- 3-Year Warranty


The SRMW-21.5R-SS is an excellent outdoor Sunlight Readable monitor. It is designed to operate in direct sunlight, or other high ambient light conditions. This monitor produces over 1,000 nits of brightness, ensuring clear, sharp images even in direct, bright sunlight. The SRMW-21.5R-SS features a rugged NEMA 4X stainless steel enclosure. It is completely sealed and will withstand rain, snow, sleet, etc. (Note there are two small ventilation holes on the bottom.) These are ideal for outdoor use in a wide range of applications including military, law enforcement, stadiums, amusement parks, advertising, transportation, marine, auto racing, oil and gas, inspection and other industries where viewability outdoors in direct sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

|                              | <b>Specifications</b>  |
|------------------------------|--|
| <b>MODEL</b>                 | <b>SRMW-21.5R-SS</b>   |
| <b>LCD Panel</b>             | 21.5" Color MVA Panel; LED Backlights                                    |
| <b>Display Resolution</b>    | 1920 x 1080 (1080p/60 Full HD)   |
| <b>Viewable Area</b>         | 18.76" x 10.55" (476.6 x 268.1 mm)                                       |
| <b>Pixel Pitch</b>           | 0.248mm  |
| <b>Display Colors</b>        | 16.7 M   |
| <b>Aspect Ratio</b>          | 16:9   |
| <b>Brightness</b>            | 1,000 nits   |
| <b>Contrast Ratio</b>        | 5,000:1  |
| <b>Viewing Angle</b>         | 178° (H) x 178° (W)  |
| <b>Response Time</b>         | 25 msec TrF  |
| <b>Control</b>               | OSD (On-Screen Display) via Pushbuttons                                  |
| <b>Video Inputs</b>          | VGA, HDMI, DisplayPort   |
| <b>Power Requirement</b>     | 90-240 VAC   |
| <b>Power Consumption</b>     | 55W  |
| <b>Enclosure</b>             | NEMA 4X Weatherproof Stainless Steel (Vent Holes On Bottom)              |
| <b>Mounting</b>              | 100 x 100 mm Rear VESA Mount Holes                                       |
| <b>Operating Temperature</b> | 32° to 122° F (0 to +50° C)  |
| <b>Shock</b>                 | 50G, Half-sine Wave, 20ms, X/Y/Z   |
| <b>Vibration</b>             | Acceleration: 1.5 G RMS; Random Wave; 10-200Hz; 30 mins Per Axis (X,Y,Z) |
| <b>Dimensions</b>            | 21.65" (W) x 13.11" (H) x 3.13" (D) (550 x 333 x 79.40mm)                |
| <b>Weight</b>                | 19.5lbs (8.83 kg)  |
| <b>Warranty</b>              | 3-Years  |

### SRMW-21.5R-SS 21.5" Outdoor Sunlight Readable LCD Monitor

#### Dimensions:

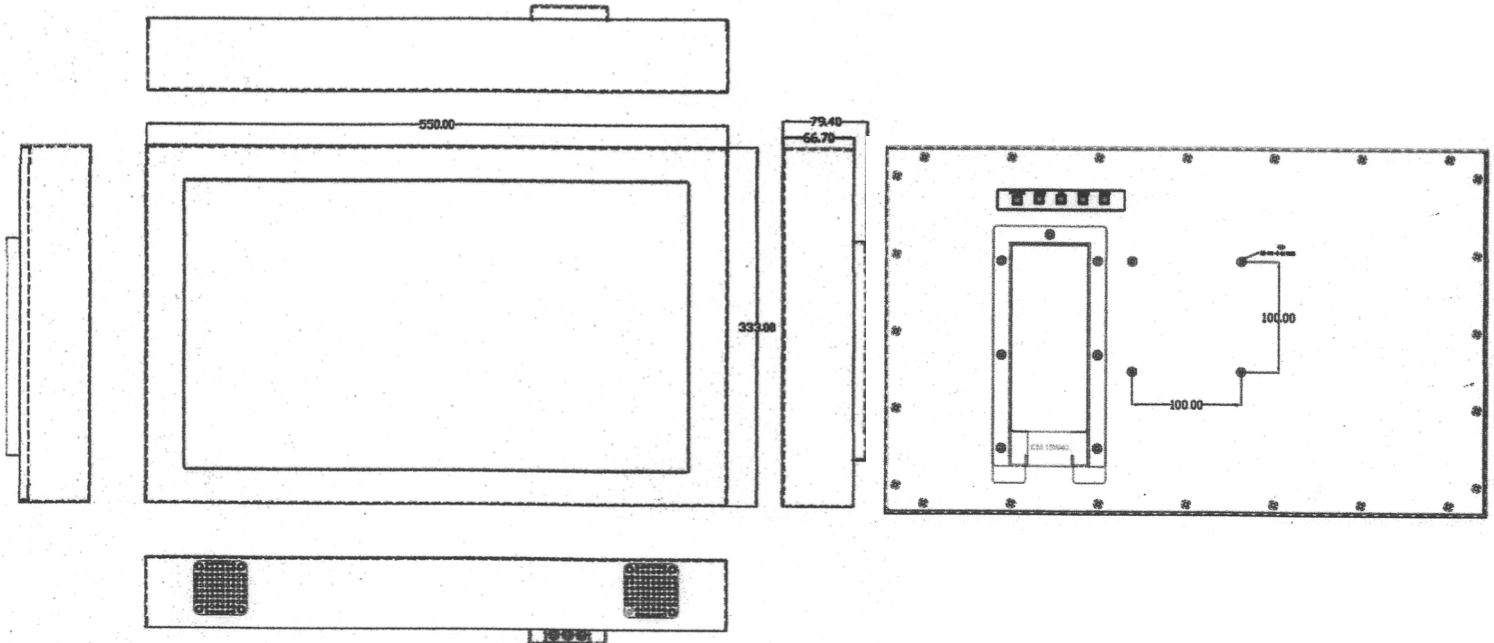

#### Standard Accessories:

- AC Power Cord
- VGA Cable
- HDMI Cable

#### Available Options:

- Touch Screen
- Vandal-Resistant Glass
- Panel-Mount Enclosure
- Optical Bonding
- DVI Input
- Wall Mount Brackets
- Private Label
- Other Customer-Specific Modifications