

VM-21.5 Series

21.5" Industrial-Grade LCD Monitor



- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- Video Inputs: VGA, HDMI, DVI, HD-SDI, Composite BNC Loop-Thru, DisplayPort
- **TRU-Tuff** Ensures Maximum Shock & Vibration Resistance
- Auto Re-Start After Power Loss
- Lockable On-Screen Display Controls
- Can Be Customized to Meet Your Needs
- 3-Year Warranty


The VM-21.5 Series full HD widescreen LCD monitors offers brilliant color, amazing high-definition resolution, and incredible picture quality while providing the reliability and ruggedness that demanding applications require. They are designed to operate 24/7/365 and are backed by our 3-Year Warranty. The VM-21.5 Series monitors are ideal for demanding industrial, commercial, medical and military applications.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit www.TRU-VuMonitors.com for more details.

Specifications				
MODEL	VM-21.5Z	VM-21.5R	VM-21.5C	VM-21.5U
LCD Panel	21.5" Color LCD (MVA Type); LED Backlights			
Display Resolution	1920 x 1080 (1080p/60 Full HD)			
Viewable Area	18.76" x 10.55" (476.6 x 268.1 mm)			
Pixel Pitch	0.248mm			
Display Colors	16.7 M			
Aspect Ratio	16:9			
Brightness	300 nits			
Contrast Ratio	5,000:1			
Viewing Angle	178° (H) x 178° (V)			
Response Time	8 ms Trf			
Control	OSD (On-Screen Display) via Pushbuttons			
Video Inputs	VGA, HD-SDI, HDMI, Composite BNC Input	VGA, HDMI & DisplayPort	VGA & DVI	VGA, HDMI Composite (BNC Loop-Thru)
Video Outputs	1 HD-SDI & 1 Composite BNC Output	---		1 Composite BNC Output
Power Requirement	12 VDC (2.1 mm Barrel Plug);			
Power Consumption	24W			
Enclosure	ABS			
Mounting	Via Included Tabletop Base or 100x100mm Rear VESA Mount Holes			
Operating Temp./Humidity	32° to 140°F (0° to +60°C); 5-90% Non-Condensing			
Storage Temperature	-4° to +140°F (-20° to +60°C)			
Shock	50G, Half-sine Wave, 20ms, X/Y/Z			
Vibration	Acceleration: 1.5 G RMS; Random Wave; 10-200Hz; 30 mins Per Axis (X,Y,Z)			
Dimensions	20.68" W x 12.60" H x 2.18" D (525.3 x 320 x 55.4mm)			
Weight	7.4 lbs. (3.4 Kg)			
Included Accessories	VGA & HDMI Cables		VGA Cable	VGA & HDMI Cables
Warranty	3-Years			

VM-21.5 Series 21.5" Industrial-Grade LCD Monitor

Dimensions

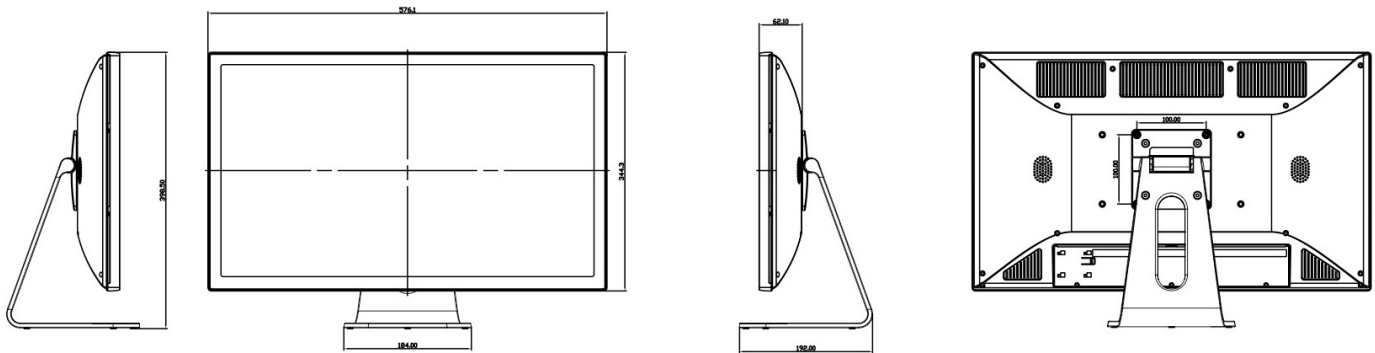

Standard Accessories:

- 90–240VAC External Power Brick
- VGA Cable
- HDMI Cable (Except 'C' Model)
- Tabletop Base

Available Options:

- Direct 120VAC Operation
- 24VDC Operation
- Panel Mount Enclosure
- Steel Enclosure
- Touch Screen
- Waterproof Enclosure
- Protective Anti-Reflective Glass
- Private-Label
- Other Customer-Specific Modifications