



### SRMHTC-24C

#### 24" Sunlight Readable Touch Screen Monitor

- True Sunlight-Readable Touch Screen Monitor
- 1,500 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Surface Capacitive Touch Screen
- Anti-Glare Glass
- Automatic Ambient Light Sensor
- Auto Re-Start After Power Loss
- Video Inputs: VGA, DVI, HDMI
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The SRMHTC-24C Sunlight Readable touch screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,500 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRMHTC-24C Sunlight Readable capacitive touch screens are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

Specifications	
MODEL	SRMHTC-24C
LCD Panel	24" Color LCD; LED Backlights
Display Resolution	1920 x 1080
Touch Screen Type	Surface Capacitive
Touch Screen Interface	USB
Viewable Area	20.92" (W) x 11.76" (H) (531.4 x 298.9 mm)
Pixel Pitch	0.277 mm
Display Colors	16:7M
Aspect Ratio	16:9
Brightness	1,500 nits
Contrast Ratio	5,000:1
Viewing Angle	178°(H) x 178°(V)
Response Time	25 ms
Control	OSD (On-Screen Display) via Front Pushbuttons
Video Inputs	VGA & DVI (HDMI via Included Adapter Cable)
Power Requirement	12VDC/90-240 VAC (with Included Power Brick)
Power Consumption	45W
Enclosure	ABS
Mounting	Included Base or 100 x 100 mm / 200 x 100 Rear VESA Mount Holes
Operating Temperature	+32° to +122°F (0 to +50°C)
Humidity	5-90% RH
Shock	50G Half-sine
Vibration	1.5G RMS 10-200Hz
Dimensions	22.68" (W) x 13.55" (H) x 2.67" (D) (576.1 x 344.3 x 68.00 mm)
Weight	9.13 lbs. (4.45 kg)
Warranty	3 Years

### SRMHTC-24C

24" Sunlight Readable Touch Screen Monitor

#### Dimensions:

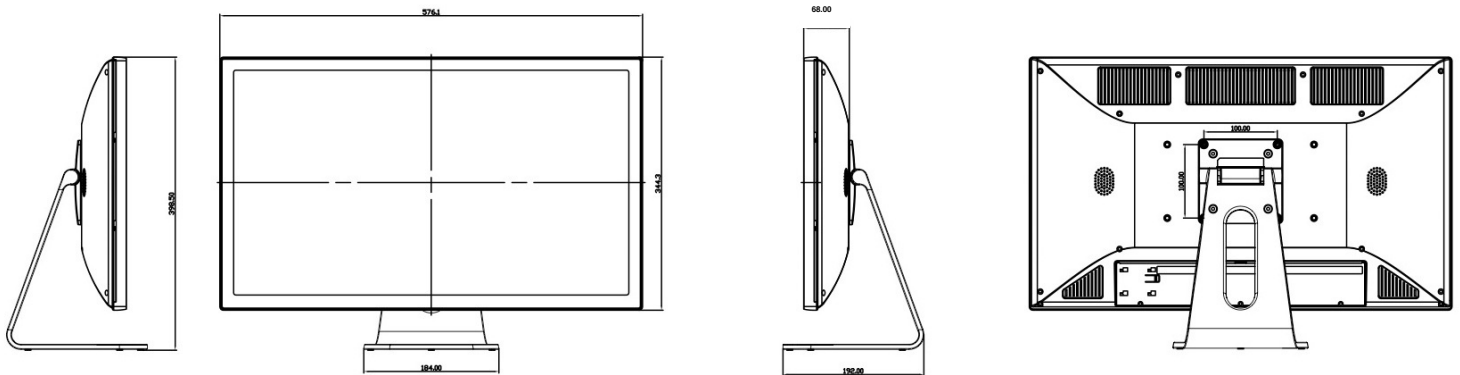

#### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- DVI-to-HDMI Cable
- USB Cable
- Tabletop Base

#### Available Options:

- 24VDC Operation
- S.A.W. (Surface Acoustic Wave) Touch Screen
- Steel Enclosure
- Open-Frame Configuration
- Dim-To-Black
- Wall Mount Brackets
- Remote Control
- Private Label
- Other Customer - Specific Modifications