



### SRMZBTP-24R

#### 24" Sunlight Readable Touch Screen Monitor

- Produces Clear, Sharp Images Even in Bright Sunlight
- 1,000 Nits Brightness
- Projected Capacitive Touch Screen
- Zero-Bezel, All Glass Front
- Full HD Resolution: 1920 x 1080
- VGA, HDMI & DisplayPort Video Inputs
- Internal Speakers
- Auto Re-Start After Power Loss
- Lockable On-Screen Display Controls
- 3-Year Warranty

The SRMZBTP-24R Sunlight Readable Touch Screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRMZBTP-24R Sunlight Readable Touch Screens feature a Projected Capacitive touch panel; they are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where operation and viewability in direct bright sunlight is crucial. Compatible with all Windows and most Linux operating systems.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

### Specifications

MODEL	SRMZBTP-24R
LCD Panel	24" Color LCD; LED Backlights
Touch Screen Type	Projected Capacitive
Touch Interface	USB
Resolution	1920 x 1080 (Full HD)
Viewable Area	20.92" (W) x 11.76" (H) (531.4 x 298.9mm)
Pixel Pitch	0.277mm
Display Colors	16.7 Million
Aspect Ratio	16:9 Widescreen
Brightness	1,000 nits
Contrast Ratio	5,000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	25 msec
Control	OSD (On-Screen Display) Via Front Buttons
Video Inputs	VGA, HDMI, DisplayPort
Audio	Dual Rear Speakers
Power Requirement	12VDC (2.5mm Barrel Plug); 90-240VAC via Included Power Brick
Power Consumption	45 W
Enclosure	ABS: Zero-Bezel Design
Mounting	Included Base or 100 x 100mm/200 x 100mm Rear VESA Mount Holes
Operating Temperature	32° to 122° F (0° to 50° C)
Humidity	5-90% RH
Shock	50 G Half-sine
Vibration	1.5 G RMS 10-200 Hz
Dimensions	22.68" (W) x 13.56" (H) x 2.44" (D) (576.14 x 344.34 x 62.10 mm)
Weight	13.2 lbs. (5.98 kg)
Warranty	3-Years

## SRMZBTP-24R 24" Sunlight Readable Touch Screen Monitor

### Dimensions:

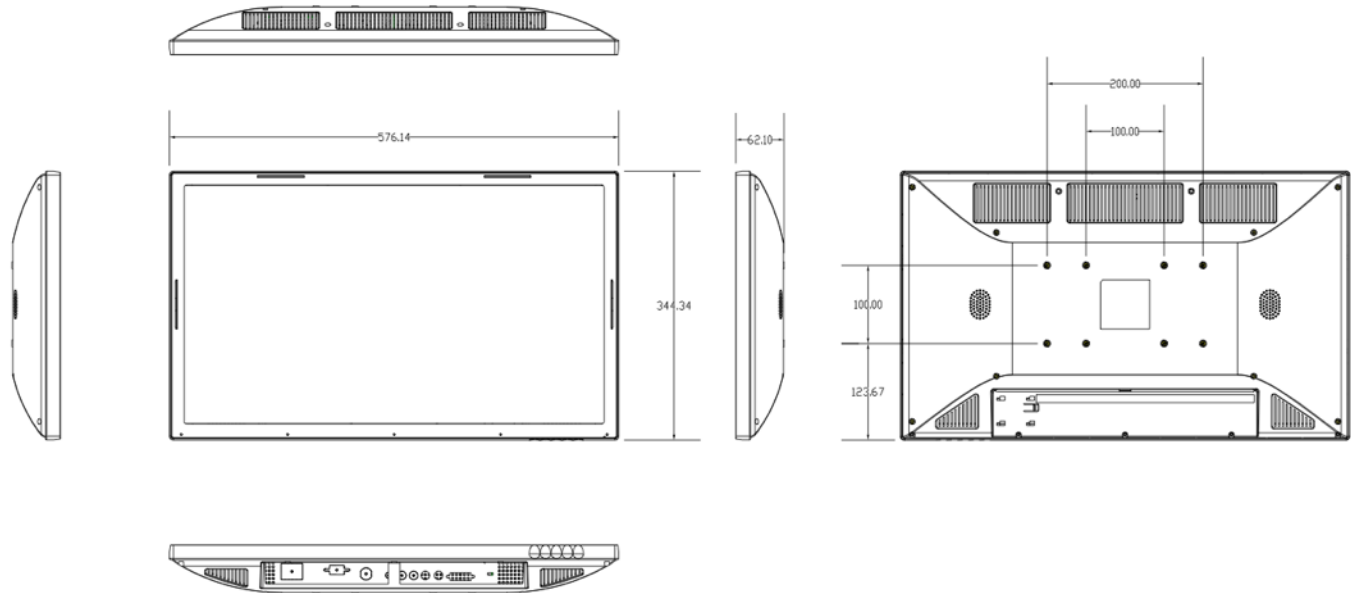

### Standard Accessories:

- AC Power Brick
- VGA Cable
- HDMI Cable
- Audio Cable
- USB Cable
- Tabletop Stand

### Available Options:

- Wall Mount Brackets
- Anti-Glare Glass
- Custom Modifications

TRU-VU Monitors, Inc.

925 E Rand Road  
Arlington Hts, IL  
60004

Ph: 847.259.2344

[www.TRU-VUMonitors.com](http://www.TRU-VUMonitors.com)

Specifications subject to change without notice.

v0817