



ZBMT-24 Series

24" HD Multi-Touch Touch Screen LCD Monitor

- Projected Capacitive Touch Technology; 10 Touch Points
- Can Be Activated Via Exposed Finger, and Surgical or Thin Cotton Gloves
- Zero-Bezel, Seamless, All-Glass Front Face
- Sleek Design, Easy to Clean
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Dual Built-in Speakers (Rear)
- Auto Re-Start After Power Loss
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The ZBMT-24 Series projected capacitive, multi-touch, Zero-Bezel touch screen monitors offer the latest in LCD touch screen technology. The projected capacitive touch technology can be activated via an exposed finger (like standard capacitive touch), and also a finger inside a surgical glove or thin cotton glove. The multi-touch capability allows 10 simultaneous touch points. It is also unaffected by dirt, grease or moisture on the glass surface. The sleek all-glass, seamless, zero-bezel front face is stylish as well as functional; it is easy to clean and eliminates the potential for contamination build-up under the bezel. The thin black housing finishes off the elegant look, and is perfect for healthcare, kiosk, hospitality and other applications. Compatible with all Windows and most Linux operating systems.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of

	Specifications	
MODEL	ZBMT-24C	ZBMT-24R
LCD Panel	24" Color LCD; LED Backlights	
Touch Screen Type	Projected Capacitive Touch	
Touch Interface	USB	
Display Resolution	1920 x 1080	
Viewable Area	20.92" x 11.76" (531.4 x 298.9 mm)	
Pixel Pitch	0.277mm	
Display Colors	16:7 M	
Aspect Ratio	16:9	
Brightness	250 nits	
Contrast Ratio	3,000:1	
Viewing Angle	178° (H) x 178° (V)	
Response Time	12 ms Trf	
Control	OSD (On-Screen Display) via Front Buttons	
Video Inputs	VGA, DVI	VGA, HDMI, DisplayPort
Audio	Dual Rear Speakers	
Power Requirement	12 VDC (2.1mm Barrel Plug) 100-240 VAC via Included Power Brick	
Power Consumption	75 W max (63 W typical)	
Enclosure	ABS, Zero-Bezel Front Face	
Mounting	100 x 100 mm / 200 x 100 mm VESA or Included Tabletop Base	
Operating Temperature	32° to 122° F (0 to 50° C)	
Humidity	5 - 90% RH	
Shock	50G Half-sine	
Vibration	1.5G rms 10-200Hz	
Dimensions	22.68" (W) x 13.56" (H) x 2.49" (D) (576.14 x 344.34 x 62.10 mm)	
Weight	13.2 lbs. (5.98 kg)	
Certifications	UL, CE, FCC, RoHS	
Warranty	3 Years	

ZBMT-24R Series

24" HD Multi-Touch Touch Screen LCD Monitor

Dimensions: (mm)

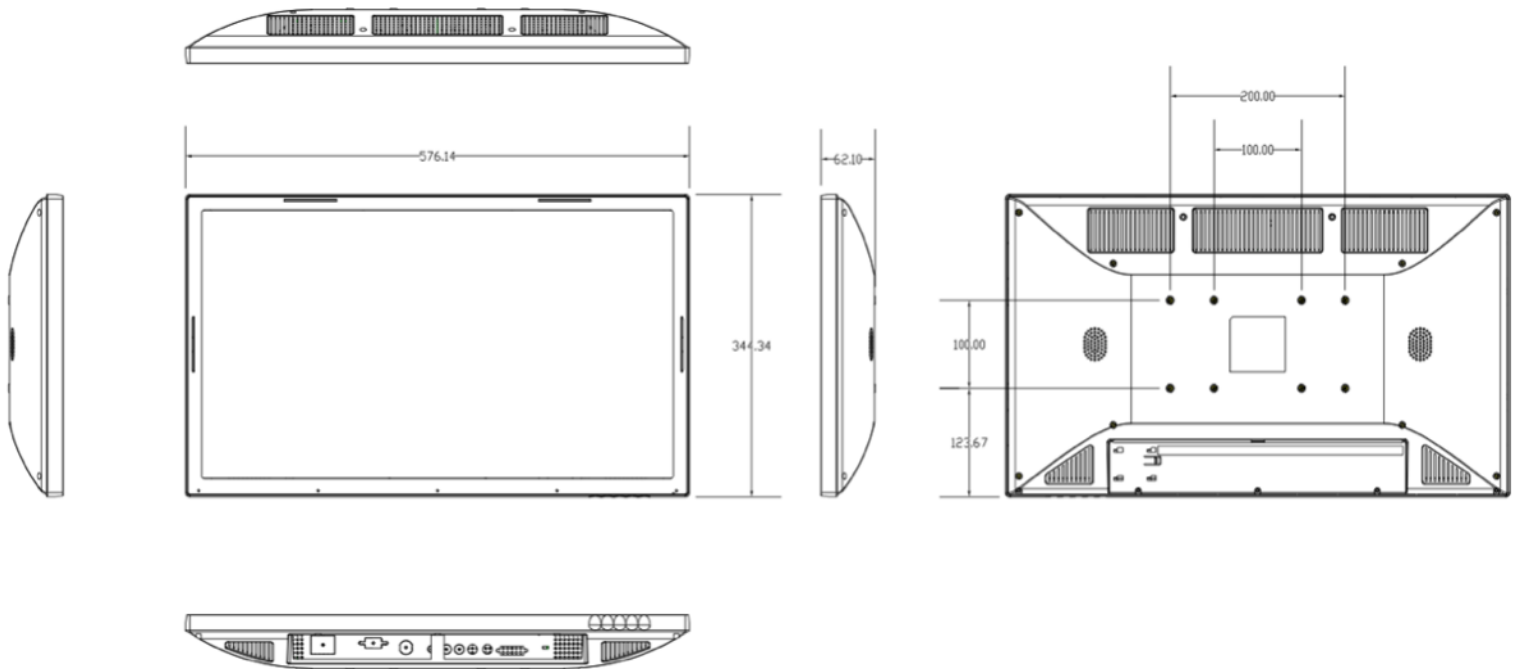

Standard Accessories:

- 90-260 VAC Power Brick
- Tabletop Stand
- VGA Cable
- HDMI Cable ("R" version only)
- USB Cable
- Audio Cable

Available Options:

- Protective/Anti-Reflective Glass
- Private Label
- Other Customer - Specific Modifications