



SRMZBTP-27R

27" Sunlight Readable Touch Screen Monitor

- True Sunlight-Readable Touch Screen Monitor
- 1,000 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- P-Cap (Projected Capacitive) Touch Panel
- Auto Re-Start After Power Loss
- Dual Speakers
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3-Year Warranty

The SRMZBTP-27R Sunlight Readable touch screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRMZBTP-27R Sunlight Readable touch screens are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial. The P-Cap touch panel enables multi-touch operation. Compatible with all Windows and most Linux operating systems. Compatible with all Windows and most Linux operating systems.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

	Specifications
MODEL	SRMZBTP-27R
LCD Panel	27" Color TFT LCD; LED Backlights
Display Resolution	1920 x 1080 (1080p/60 Full HD)
Touch Screen Type	Projected Capacitive (P-Cap)
Touch Screen Interface	USB
Viewable Area	23.52" x 13.25" (597.6 x 336.15 mm)
Pixel Pitch	0.311mm
Display Colors	16:7M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	1,000:1
Viewing Angle	170°(H) x 160°(V)
Response Time	12 ms Trf
Control	OSD (On-Screen Display) via Pushbuttons
Video Input Connectors	VGA, HDMI, DisplayPort
Audio	Dual Rear Speakers
Power Requirement	12 VDC (2.5 mm Barrel Plug); 90-240 VAC via Included Power Brick
Power Consumption	45W
Enclosure	ABS
Mounting	Via Included Base or 100 x 100 mm / 200 x 100 Rear VESA Mount Holes
Operating Temperature	14° to 122°F (-10 to 50°C)
Dimensions	25.38" (W) x 15.25" (H) x 2.63" (D) (644.65 x 387.35 x 66.80 mm)
Weight	16.3 lbs. (7.39 kg)
Warranty	3-Years

SRMZBTP-27R

27" Sunlight Readable Touch Screen Monitor

Dimensions:

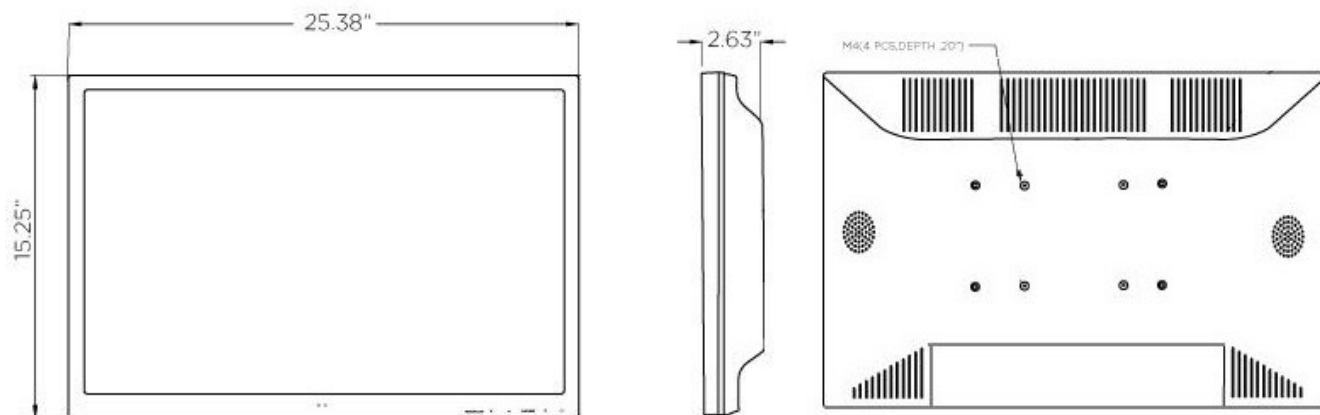

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- HDMI Cable
- Audio Cable
- USB Cable
- Tabletop Base

Available Options:

- Automated Ambient Light Sensor
- 24VDC Operation
- DVI Input
- Open-Frame Configuration
- Dim-To-Black
- Protective Anti-Reflective Glass
- Surface Capacitive Touch Screen
- Wall Mount Brackets
- Remote Control
- Private Label
- Other Customer - Specific Modifications