



VM-32D

32" Customizable Industrial HD LCD Monitor

- 32" HD Color LCD Monitor
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Aspect Correction: Does Not Distort 4:3 Image on 16:9 Screen
- Video Inputs: VGA, HDMI, Composite (BNC Loop-Thru), NTSC PAL
- Picture-In-Picture
- 12 VDC Output
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3-Year Warranty

The VM-32D HD monitor is ideal for industrial, commercial, A/V, broadcast, and other applications. It provides crystal-clear HD images, picture-in-picture, and more. It is available in a standard enclosure, open frame or touch screen configurations. An extensive list of available OEM options enables you to customize the VM-32D to your specific needs. Visit www.TRU-VuMonitors.com for more details.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical, and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.

Specifications	
LCD Panel	32" TFT Color LCD
Display Resolution	1920 x 1080 (Full HD)
Viewing Area	27.48" (W) x 15.43" (H)
Pixel Pitch	0.364mm X 0.364mm
Display Colors	16.7 Million
Aspect Ratio	16:9
Brightness	500 nits
Contrast Ratio	4,000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	6.5 msec (gray to gray)
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons or Remote Control
VGA Inputs	VGA, HDMI, Composite (BNC) x 3
Video Outputs	Composite (BNC)
In / Out Impedance	75Ω / Auto Terminating Output
Power Requirement	24 VDC or 90-240 VAC
Power Consumption	100 Watts
Enclosure	Black Powder-Coated Steel
Mounting	Mounting Stand (shown) Included; VESA Mounting 100x100mm, 100x200mm, 200x200mm
Operating Temperature	32° to 104° F / 0° to 40° C
Humidity	10-90% RH
Shock	50 G (1/2 sine, 20 msec) +/-X, +/-Y, +/-Z (one time each axis)
Vibration	1.0 G RMS (Random Wave, 10-300Hz) 10 minutes each axis (X,Y,Z)
Approvals	UL/cUL, FCC, CE, RoHS
Dimensions	29.33" (W) x 17.8" (H) x 2.2" (D) (745 x 452 x 56.80 mm)
Weight	32 lbs. (14.5 kg)

VM-32D

32" Customizable Industrial HD LCD Monitor

Dimensions:

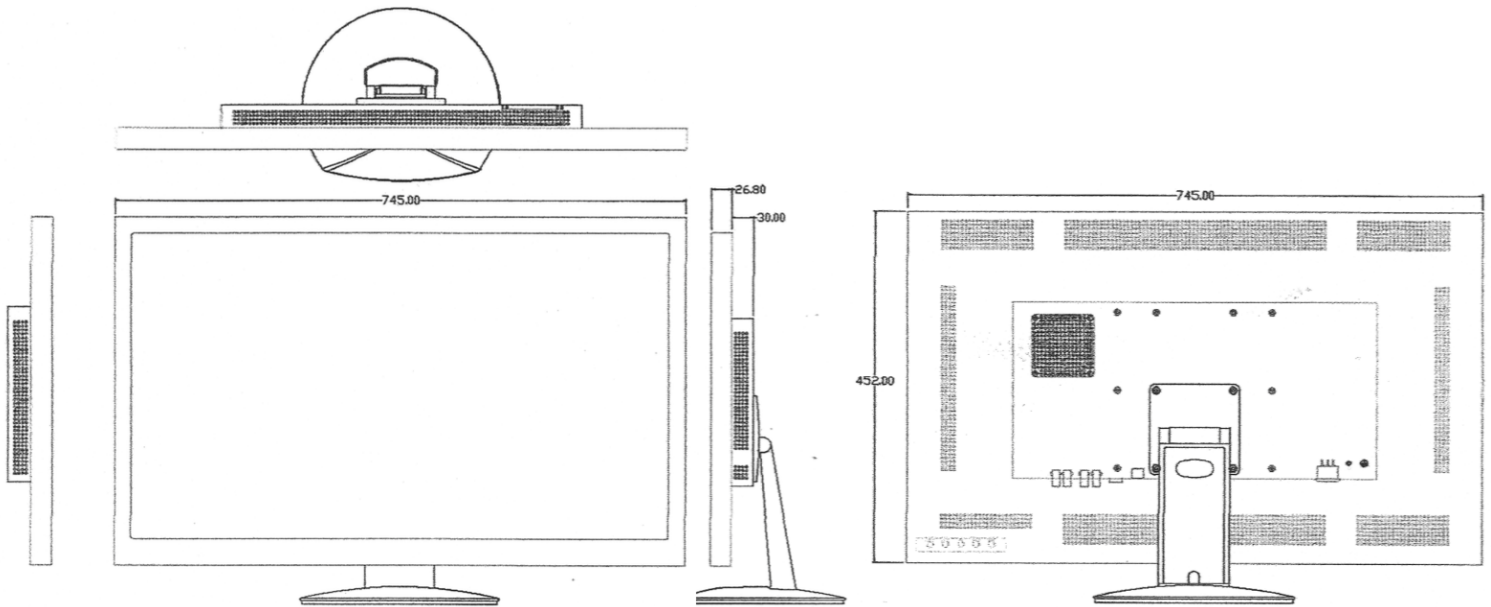

Standard Accessories:

- AC Power Cord
- Tabletop Stand
- VGA Cable
- Remote Control

Available Options:

- Internal Speakers
- Protective/Anti-Reflective Glass
- Open-Frame Configuration
- Touch Screen
- HD-SDI Input
- Private Label
- Other Customer – Specific Modifications