



### SXUHD-49

#### 49" Water-Resistant 4K LCD Monitor/TV

- 4K Resolution: 3840 X 2160 (UHD)
- Rugged, Water-Resistant Enclosure (IP 55)
- No Isotropic Black-out in Direct Sunlight
- Wide Viewing Angle: 178° x 178°
- Auto Re-Start After Power Loss
- Internal Speakers
- Waterproof Universal Remote Control
- Video Inputs: VGA, HDMI, DisplayPort, YPbPr  
Component, Composite, Coax, USB


The new SXUHD-49 is a water-resistant LCD monitor with 4K resolution for incredible picture quality indoors or outdoors. It is designed for use in challenging, harsh industrial environments such as manufacturing plants, steel mills, wood/pulp/paper, etc, as well as outdoors. The IP 55 rated enclosure, LCD panel with high TNi to ensure the screen will not black-out in direct sunlight and vivid 4K resolution will ensure high-quality video images in nearly any environment.

Specifications	
<b>MODEL</b>	<b>SXUHD-49</b>
<b>LCD Panel</b>	49" IPS Panel with High TNi and AR Coating
<b>Display Resolution</b>	3840 x 2160 (4K - UHD)
<b>Viewable Area</b>	42.28" (W) x 23.78" (H) (1073.912 x 604.012 mm)
<b>Pixel Pitch</b>	.280 x 288 mm
<b>Display Colors</b>	10 Bit, 16.7 Billion Colors
<b>Aspect Ratio</b>	16:9
<b>Brightness</b>	500 nits
<b>Contrast Ratio</b>	1,100:1
<b>Viewing Angle</b>	178° (H) x 178° (V)
<b>Response Time</b>	8ms (Gray to Gray)
<b>Refresh Rate</b>	60 Hz
<b>Video Inputs</b>	VGA, HDMI (3), DisplayPort, Composite (RCA), Component (YPbpr), Coax, USB
<b>Audio Inputs/Outputs</b>	VGA Stereo Audio Input (3.5 mm); 5W + 5W Audio Stereo Output; Analog 3.5mm Headphone Jack; Toslink Digital Optical Audio Output
<b>Additional Inputs/Outputs</b>	USB, RS232, IR Extender, 5VDC Output (USB-A Female), 12 VDC 2.5A Output (2.5mm ID, 5.5mm OD)
<b>Speakers</b>	8W/Channel; 8 Ω load
<b>Power Requirement</b>	110 VAC to 240 VAC, 50 to 60 Hz
<b>Power Consumption</b>	Nominal=120W; Max=153W
<b>Enclosure</b>	Rugged IP 55 Aluminum Enclosure
<b>Mounting</b>	400mm x 200mm VESA Hole Pattern
<b>Operating Temperature</b>	-22°F to +122°F (-30°C to +50°C)
<b>Shock</b>	30 Grms, Half Sine Wave, 11 ms, X, Y, Z one time each direction
<b>Vibration</b>	0.5 Grms, Random Wave, Bandwidth 10-300Hz, Duration X, Y, Z each direction per 10 min
<b>Dimensions</b>	45.13" (W) x 26.64" (H) x 3.95" (D) (1146 x 677 x 100 mm)
<b>Weight</b>	52.80 lb (23.95 kg)
<b>Warranty</b>	2 Years

## SXUHD-49

49" Water-Resistant 4K LCD Monitor/TV

### Dimensions

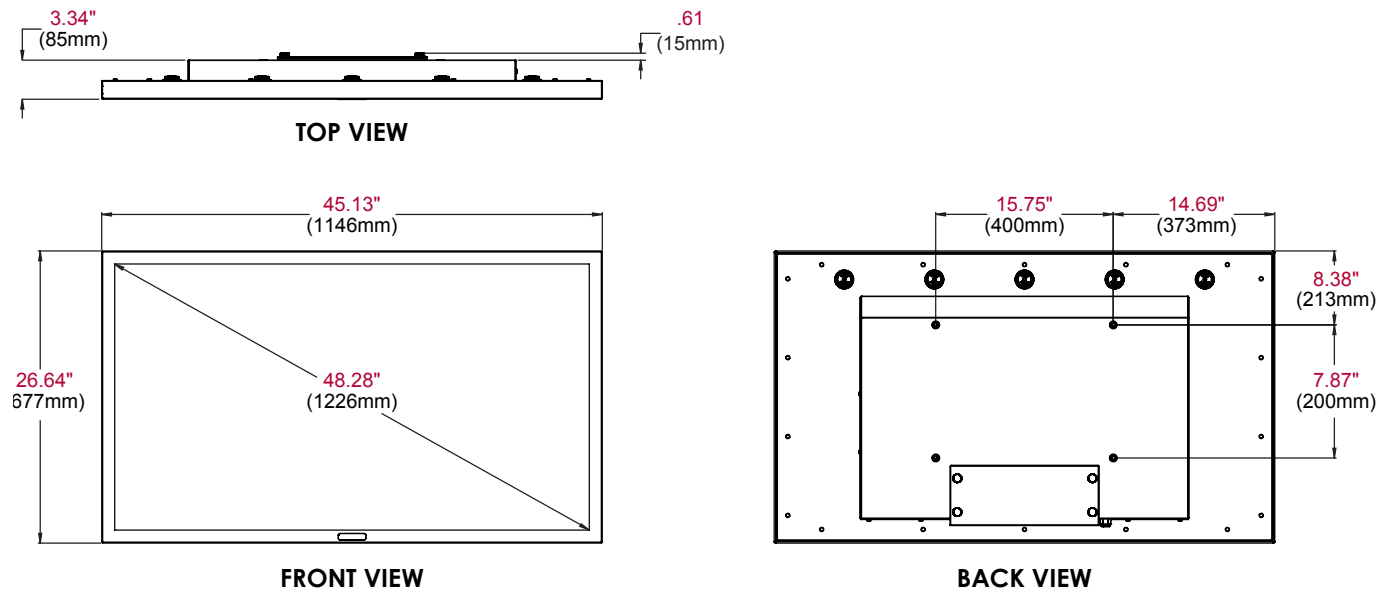

### Standard Accessories:

- Power Cord
- Waterproof Universal Remote
- Cable Entry Cover Panel
- Display Cover
- IR Extender
- Manual

### Available Options:

- Outdoor Tilt Wall Mount
- Outdoor Articulating Wall Mount
- 5 VDC Power Kit
- 12 VDC Power Kit