



SRMHT-15 Series

15" Sunlight-Readable Touch Screen Monitors

- Produce Clear, Sharp Images Even in Direct Bright Sunlight
- 5-Wire Resistive Touch or Capacitive Touch
- 1,500 –1,700 Nits Brightness
- LED Backlights
- High Shock & Vibration Resistance
- Lockable On-Screen Display Controls
- 3-Year Warranty

The SRMHT-15 Series Sunlight Readable Touch Screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRMHT-15 Series Sunlight Readable Touch Screens are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details..


Specifications

MODEL	SRMHTR-15B	SRMHTR-15C	SRMHTR-15C-17
LCD Panel	15" Color TFT LCD Monitor		
Touch Technology	5-Wire Resistive Touch		Capacitive
Touch Interface	USB		
Resolution	1024 x 768 (XGA)		
Viewable Area	11.97" (W) x 8.98" (H) (304.03 x 228.09 mm)		
Pixel Pitch	0.297mm x 0.297mm		
Display Colors	16.2 Million		
Aspect Ratio	4:3		
Brightness	1,500 nits		1,700 nits
Contrast Ratio	700:1		
Viewing Angle	170° (H) x 160° (V)		
Response Time	8 msec Trf		
Control	OSD (On-Screen Display) via Front Panel Pushbuttons		
Video Inputs	VGA, Composite (BNC Loop-Thru) NTSC/PAL Auto-Recognition	VGA, DVI	VGA, DVI
Analog Video In / Out	1 BNC Input / 1 BNC Output	--	--
In / Output Impedance	75Ω / Auto Terminating Output		
Power Requirement	12 VDC (90-240 VAC with Included Power Brick)		
Power Consumption	48 Watts		
Enclosure	ABS		
Mounting	Included Base or 75x75mm VESA Hole Pattern		
Operating Temperature	-22° to 185° F / -30° to 85° C		
Humidity	5-90% RH		
Shock	50 G (20 msec, 1/2 sine)		
Vibration	1.5G RMS 10-200 HZ		
Approvals	UL/cUL, FCC, CE, TUV, RoHS		
Dimensions	13.7" (W) x 10.9" (H) x 1.5" (D) / 347.97 (W) x 276.86 (H) x 38.09 (D) mm		

SRMHT-15 Series

15" Sunlight Readable Touch Screen Monitors

Dimensions:

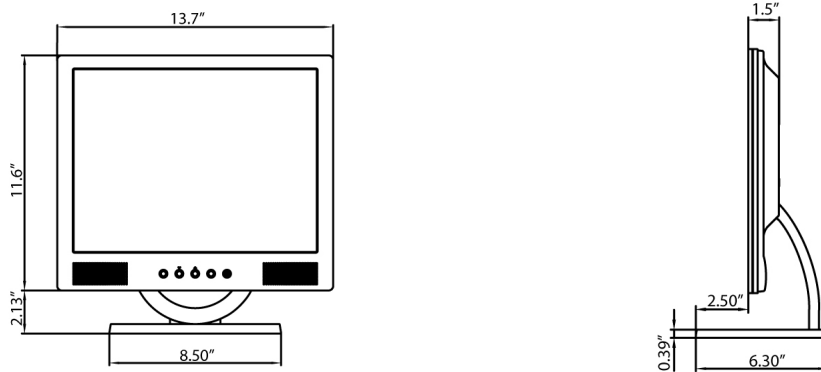

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Heavy-Duty Tabletop Base

Available Options:

- 1,700 Nits LCD Panel
- Protective Anti-Reflective Glass
- Speakers
- Wall Mount Brackets
- Panel Mount
- Rack Mount
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications