



VMOBT-10.4 Series

10.4" Daylight Readable Touch Screen LCD Monitor

- **Optical Bonding** Produces Clear, Bright Images Even in Bright Daylight Conditions
- 5-Wire Resistive Touch Screen or Surface Capacitive Touch
- Anti-Glare Protective Outer Glass
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Can Be Customized To Meet Your Needs
- 3-Year Warranty


The VMOBT-10.4 Series is an optically-bonded touch screen LCD monitor, designed to dramatically improve viewability in sunlight and other high ambient light conditions. The optical bonding process injects an optical-grade epoxy bond between the surface of the LCD panel and the outer protective glass, eliminating the air gap between the two. This eliminates two reflective surfaces, and drastically reduces image wash-out due to internal reflections. The outer glass surface also has an Anti-Glare coating. The net result is a dramatic reduction in unwanted reflections, and a tremendous increase in contrast ratio, making the monitor much more suitable for use in brightly lit areas and daylight outdoors. Optical bonding also provides other benefits such as increased ruggedness and durability, prevents condensation or fogging, and makes the outer glass shatter-proof. To learn more about optical bonding, click [HERE](#). To see a video of a live side-by-side comparison of an optically bonded, sunlight readable and standard LCD monitor, click [HERE](#).

The VMOBT-10.4 Series Daylight Readable Touch Screen LCD monitor is built with industrial-grade components, and receives our exclusive **TRU-Tuff** treatment. The **TRU-Tuff** process includes: RTV silicone on all connections and critical components; all wires are dressed, tie-wrapped and secured; and ThreadLock on all screws. This, plus the rugged powder-coated steel enclosure, ensures maximum shock and vibration resistance. This monitor is ideal for a wide range of demanding applications including industrial, military, law enforcement, aviation, marine, inspection, surveying, cranes, oceanic, entertainment and transportation. **TRU-Vu** monitors are backed by our full 3-Year Warranty.

| | Specifications | |
|-----------------------|--|--------------------------|
| MODEL | VMOBTR-10.4B | VMOBTC-10.4C |
| LCD Panel | 10.4" Color LCD; LED Backlights | |
| Touch Screen Type | 5-Wire Resistive Touch | Surface Capacitive Touch |
| Touch Interface | USB | |
| Resolution | 800 x 600 (SVGA) | |
| Viewable Area | 8.31" (W) x 6.24" (H) (211.2 x 158.4 mm) | |
| Pixel Pitch | 0.264 mm | |
| Display Colors | 16:2 M | |
| Aspect Ratio | 4:3 | |
| Brightness | 400 nits | |
| Contrast Ratio | 900:1 | |
| Viewing Angle | 160° (H) x 130° (V) | |
| Response Time | 15 msec | |
| Control | OSD (On-Screen Display) via Rear Panel Pushbuttons | |
| Video Inputs | VGA, Composite BNC Loop-Thru, NTSC/PAL | VGA & DVI |
| Power Requirement | 12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Adapter | |
| Power Consumption | 10.4W (866 mA @ 12 VDC) | |
| Enclosure | Powder-Coated Steel | |
| Mounting | 75 x 75 mm Rear VESA Mount Holes | |
| Operating Temperature | -22° to +140° F (-30 to +60° C) | |
| Humidity | 5 - 90% RH | |
| Shock | 50G, 20ms, Half-sine wave | |
| Vibration | 1.5G (10-200 Hz, P-P) 30 mins./axis (X,Y,Z) | |
| Dimensions | 10.13" (W) x 7.96" (H) x 1.73" (D) (257.4 x 202.2 x 44) | |
| Weight | 3.75 lbs. (1.70 kg) | 4.25 lb (1.93 kg) |

VMOBT-10.4 Series 10.4" Optically Bonded Touch Screen Monitor

Dimensions:

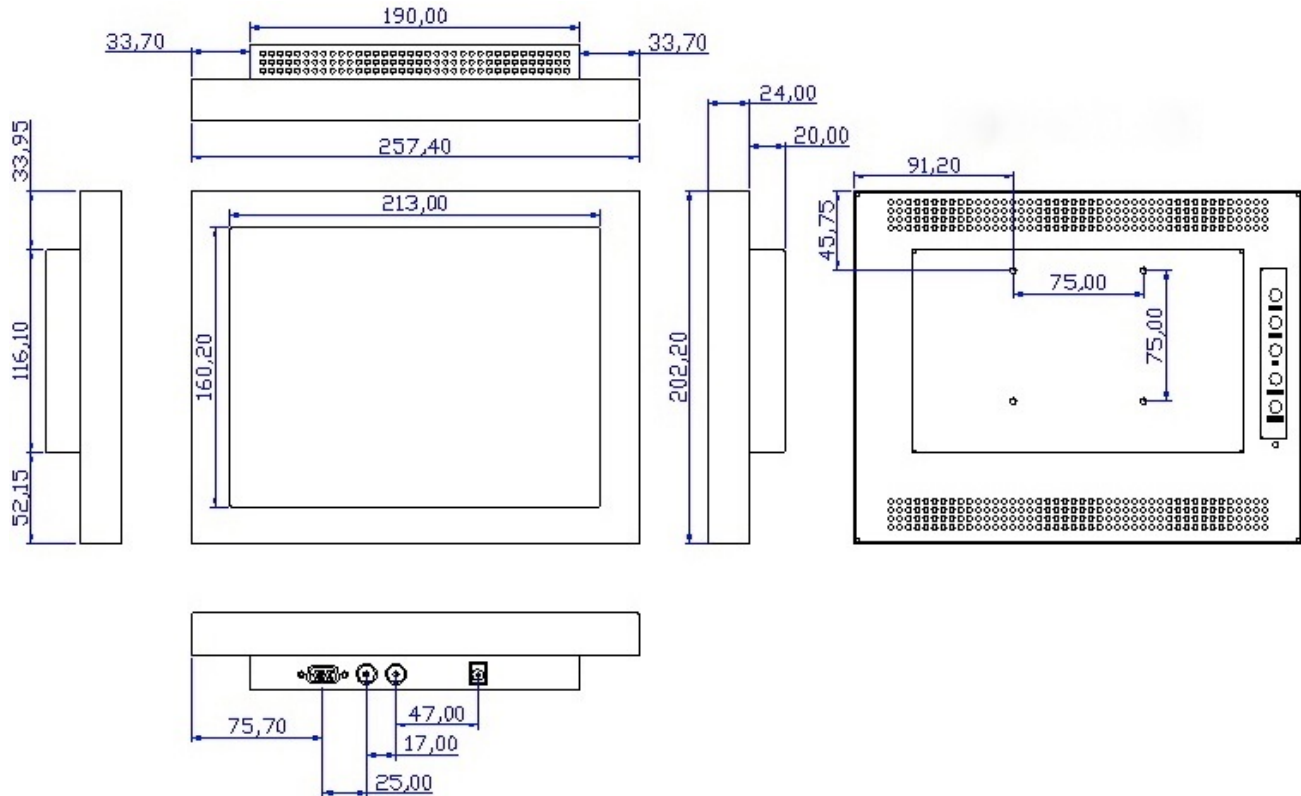

Standard Accessories:

- 90-240 VAC Power Adapter
- Touch Driver CD
- USB Cable

Available Options:

- Move OSD Control Buttons onto Front Bezel
- DVI Video Input
- 11-36 VDC Operation
- 1024 x 768 Resolution
- Panel Mount
- Open-Frame Configuration
- Private Label
- Wall Mount or Tabletop Bracket
- Other Customer - Specific Modifications