



### VMTR-10.4V

#### 10.4" Industrial Touch Screen Monitor

- 10.4" 5-Wire Resistive Touch Screen
- Resolution: 800 x 600 (SVGA)
- LED Backlights
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Can Be Customized To Meet Your Needs
- 3 Year Warranty


The VMTR-10.4V Touch Screen monitor utilizes 5-wire resistive touch technology; the screen can be activated via a finger, gloved hand, credit card or stylus. State-of-the-art LED backlights produce images that are exceptionally clear and bright; the touch contact activation points are extremely accurate. An extensive list of OEM options enables you to customize the VMTR-10.4V to meet your exact needs.

The VMTR-10.4V Touch Screen LCD monitor is built with industrial-grade components, and receives our exclusive **TRU-Tuff** treatment. The **TRU-Tuff** process includes: RTV silicone on all connections and critical components; all wires are dressed, tie-wrapped and secured; and ThreadLock on all screws. This, plus the rugged powder-coated steel enclosure, ensures maximum shock and vibration resistance. This monitor is ideal for a wide range of demanding applications including industrial, military, law enforcement, aviation, marine, inspection, surveying, cranes, oceanic, entertainment and transportation. **TRU-Vu** monitors are backed by our full 3-Year Warranty.

Specifications	
<b>MODEL</b>	<b>VMTR-10.4V</b>
<b>LCD Panel</b>	10.4" Color LCD; LED Backlights
<b>Touch Screen Type</b>	5-Wire Resistive Touch
<b>Controller</b>	USB
<b>Resolution</b>	800 x 600 (SVGA)
<b>Display Area</b>	8.31" (W) x 6.24" (H) (211.2 x 158.4 mm)
<b>Pixel Pitch</b>	0.264 mm
<b>Display Colors</b>	16:2 M
<b>Aspect Ratio</b>	4:3
<b>Brightness</b>	400 nits
<b>Contrast Ratio</b>	700:1
<b>Viewing Angle</b>	160° (H) x 130° (V)
<b>Response Time</b>	30 msec
<b>Control</b>	OSD (On-Screen Display) via Rear Panel Pushbuttons
<b>Video Inputs</b>	VGA
<b>Power Requirement</b>	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Adapter
<b>Power Consumption</b>	10.4W (866 mA @ 12 VDC)
<b>Enclosure</b>	Powder-Coated Steel
<b>Mounting</b>	75 x 75 mm Rear VESA Mount Holes
<b>Operating Temperature</b>	-22° to +140° F (-30 to +60° C)
<b>Humidity</b>	5 - 90 % RH
<b>Shock</b>	50G, 20ms, Half-sine wave
<b>Vibration</b>	1.5G (10-200 Hz, P-P) 30 mins./axis (X,Y,Z)
<b>Dimensions</b>	10.13" (W) x 7.96" (H) x 1.73" (D) (257.4 x 202.2 x 44 mm)
<b>Weight</b>	3.90 lbs. / 1.77 kg

### VMTR-10.4V 10.4" Touch Screen LCD Monitor

#### Dimensions:

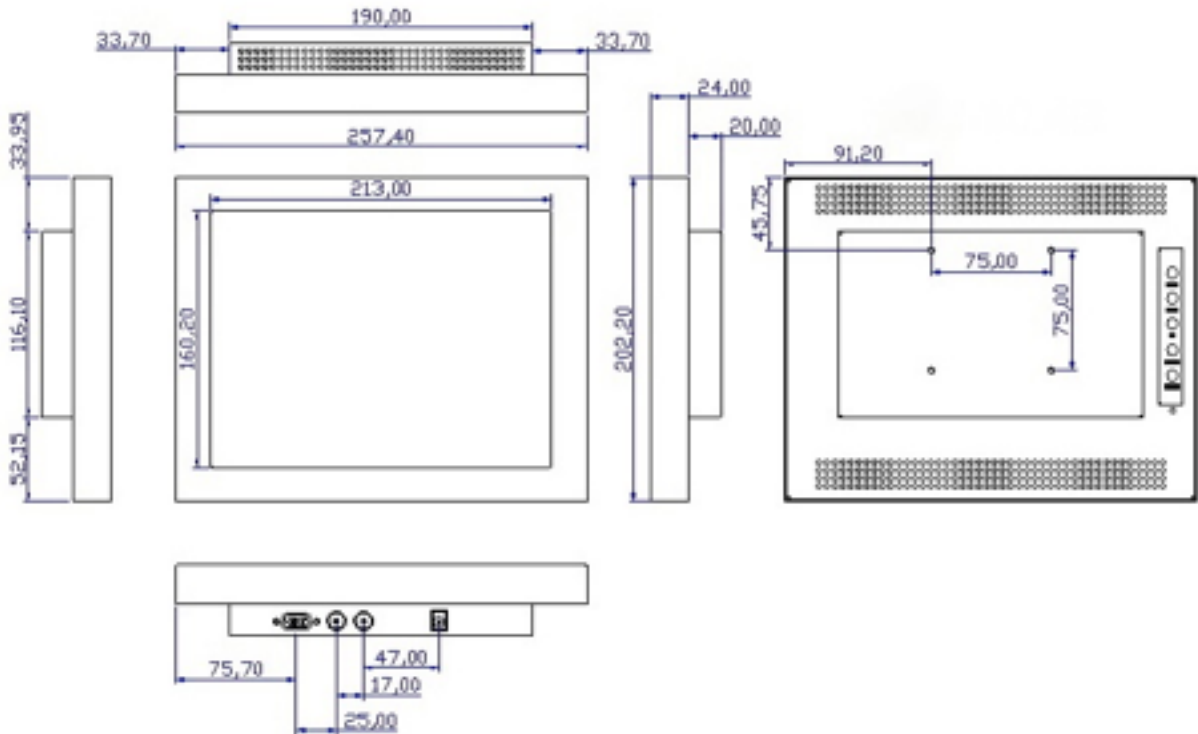

#### Standard Accessories:

- 90-240 VAC Power Adapter
- VGA Cable
- USB Cable

#### Available Options:

- 12-24 VDC operation (VMTR-10.4R-24)
- Move OSD Control Buttons onto Front Bezel
- Surface Capacitive Touch Screen
- DVI Video Input
- 11-36 VDC Operation
- Panel Mount
- Rack Mount
- Open-Frame Configuration
- Private Label
- Wall Mount or Tabletop Bracket
- Other Customer - Specific Modifications