



### SRMHXWP-12R

#### 12" Sunlight Readable Waterproof Panel-Mount Monitor

- Produce Clear, Sharp Images Even in Direct Bright Sunlight
- 1,500 Nits Brightness
- Stainless Steel Panel-Mount Enclosure
- NEMA 4X / IP65 Waterproof Front Face
- Resolution: 1024 x 768
- Ambient Light Sensor to Adjust Screen Brightness Automatically
- Auto Re-Start After Power Loss


The SRMHXWP-12R Sunlight Readable waterproof panel-mount monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,500 nits of brightness (vs. 250-300 nits for standard monitors). They are ideal for wash-down environments or where liquids, steam or moisture may damage standard monitors. The SRMHXWP-12R is perfect for use in a wide range of industrial, marine, military, manufacturing, inspection, advertising and transportation applications where viewability in direct, bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuyMonitors.com](http://www.TRU-VuyMonitors.com) for more details.

	Specifications
<b>MODEL</b>	<b>SRMHXWP-12R</b>
<b>LCD Panel</b>	12" Color TN Panel (LED Backlights)
<b>Resolution</b>	1024 x 768 (XGA)
<b>Viewable Area</b>	9.67" (W) x 7.26" (H) (245.76 x 184.32 mm)
<b>Pixel Pitch</b>	0.240mm
<b>Display Colors</b>	16.2 M
<b>Aspect Ratio</b>	4:3
<b>Brightness</b>	1,500 nits
<b>Contrast Ratio</b>	700:1
<b>Viewing Angle</b>	160° (H) x 160° (W)
<b>Response Time</b>	35 msec Trf
<b>Control</b>	OSD (On-Screen Display) via Rear Panel Pushbuttons
<b>Video Inputs</b>	VGA, HDMI, DisplayPort
<b>Power Requirement</b>	90-240 VAC
<b>Power Consumption</b>	TBD
<b>Enclosure</b>	Panel-Mount with Rear Clamp; Stainless Steel
<b>Enclosure Rating</b>	NEMA 4X / IP65
<b>Operating Temperature</b>	-22° to 185° F (-30 to 85° C)
<b>Shock/Vibration</b>	120 G (20 msec, ½ sine) / 1.0 G RMS 10-3
<b>Dimensions</b>	13.9" (W) x 11.05" (H) x 2.17" (D) (353.2 x 280.7 x 55.18 mm)
<b>Weight</b>	8.54 lbs. (3.87 kg)
<b>Warranty</b>	3 Years

## SRMHXWP-12R

12" Sunlight Readable Waterproof Panel-Mount Monitor

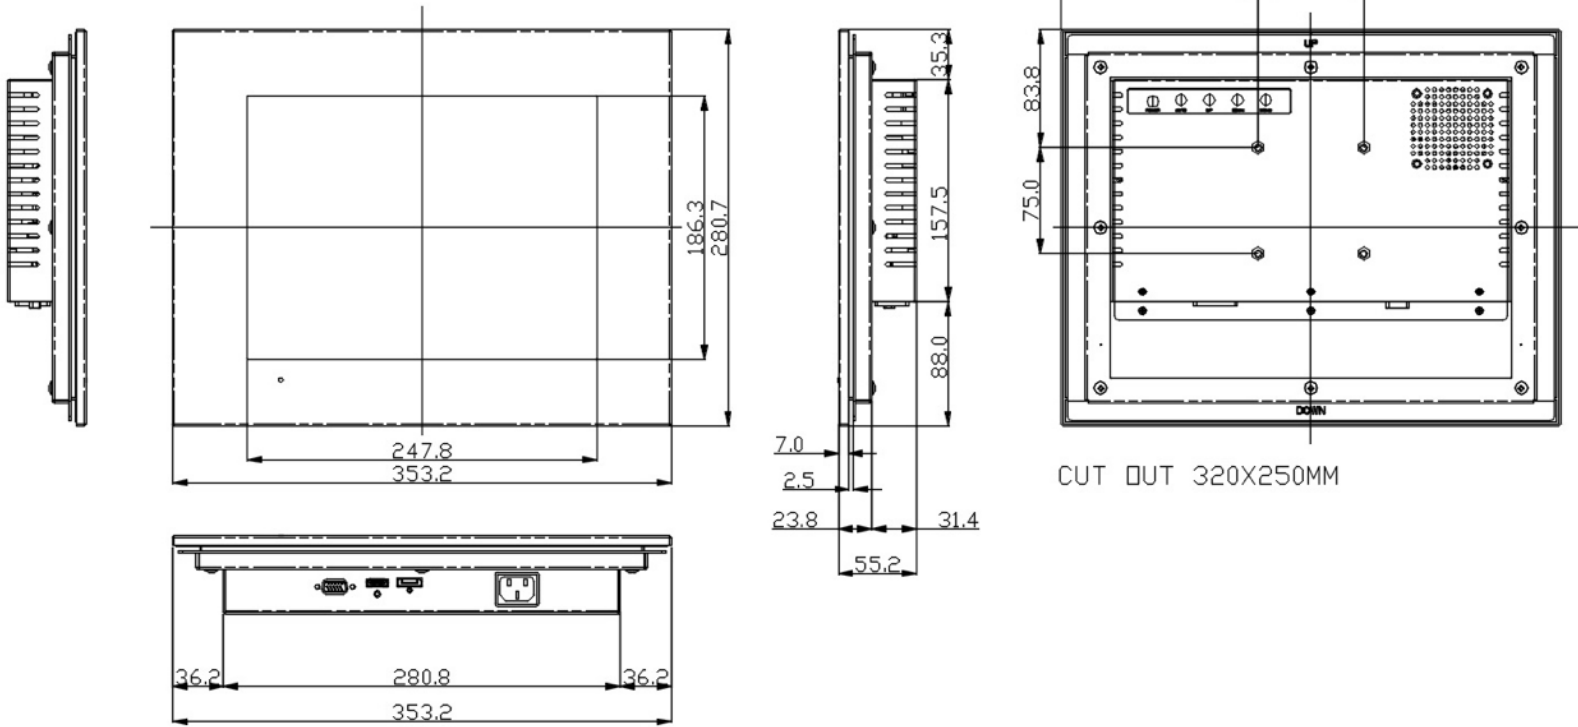

### Standard Accessories:

- AC Power Cord
- VGA Cables
- HDMI Cables

### Available Options:

- 12-24 VDC Operation
- DVI Input
- Optical Bonding
- Touch Screen
- Private-Label