



SRMHTPPM-13.3G

13.3" Sunlight Readable Panel-Mount Touch Screen

- 1,500 nits Brightness
- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- Automatic Ambient Light Sensor
- Rugged Steel Panel Mount Enclosure
- Lockable On-Screen Display (OSD) Controls
- Auto Re-Start After Power Loss
- **TRU-Tuff** Ensures Maximum Shock and Vibration Resistance
- Can Be Customized to Meet Your Needs


The SRMHTPPM-13.3G Sunlight Readable touch screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. It utilizes state-of-the-art LED backlights to produce over 1,500 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The P-Cap touch screen enables multi-touch capability. SRMHTPPM-13.3G touch screen monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising, material handling (cranes) and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

Specifications

MODEL	SRMHTPPM-13.3G
LCD Panel	13.3" AHVA LCD; LED Backlights
Touch Screen Type	Projected Capacitive (P-Cap)
Touch Interface	USB
Resolution	1920 x 1080 (1080P/60 Full HD)
Viewable Area	11.55" (W) x 6.50" (H) (293.472 x 165.078 mm)
Pixel Pitch	0.15285mm
Display Colors	16.7 M
Aspect Ratio	16:9
Brightness	1,500 nits
Contrast Ratio	800:1
Viewing Angle	178° (H) x 178° (V)
Response Time	25msec Trf
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons
Video Inputs	DVI, HDMI, Composite (BNC Loop-Thru)
Power Requirement	9-36 VDC
Enclosure	Steel (Black) Panel-Mount, with Rear Clamp
Operating Temperature	32° to 158° F (0° to +70° C)
Humidity	5-90% RH
Shock	50 G (20 msec, 1/2 sine)
Vibration	1.5G RMS 10-200 HZ
Dimensions	TBD
Weight	TBD
Warranty	3 Years

Dimensions:

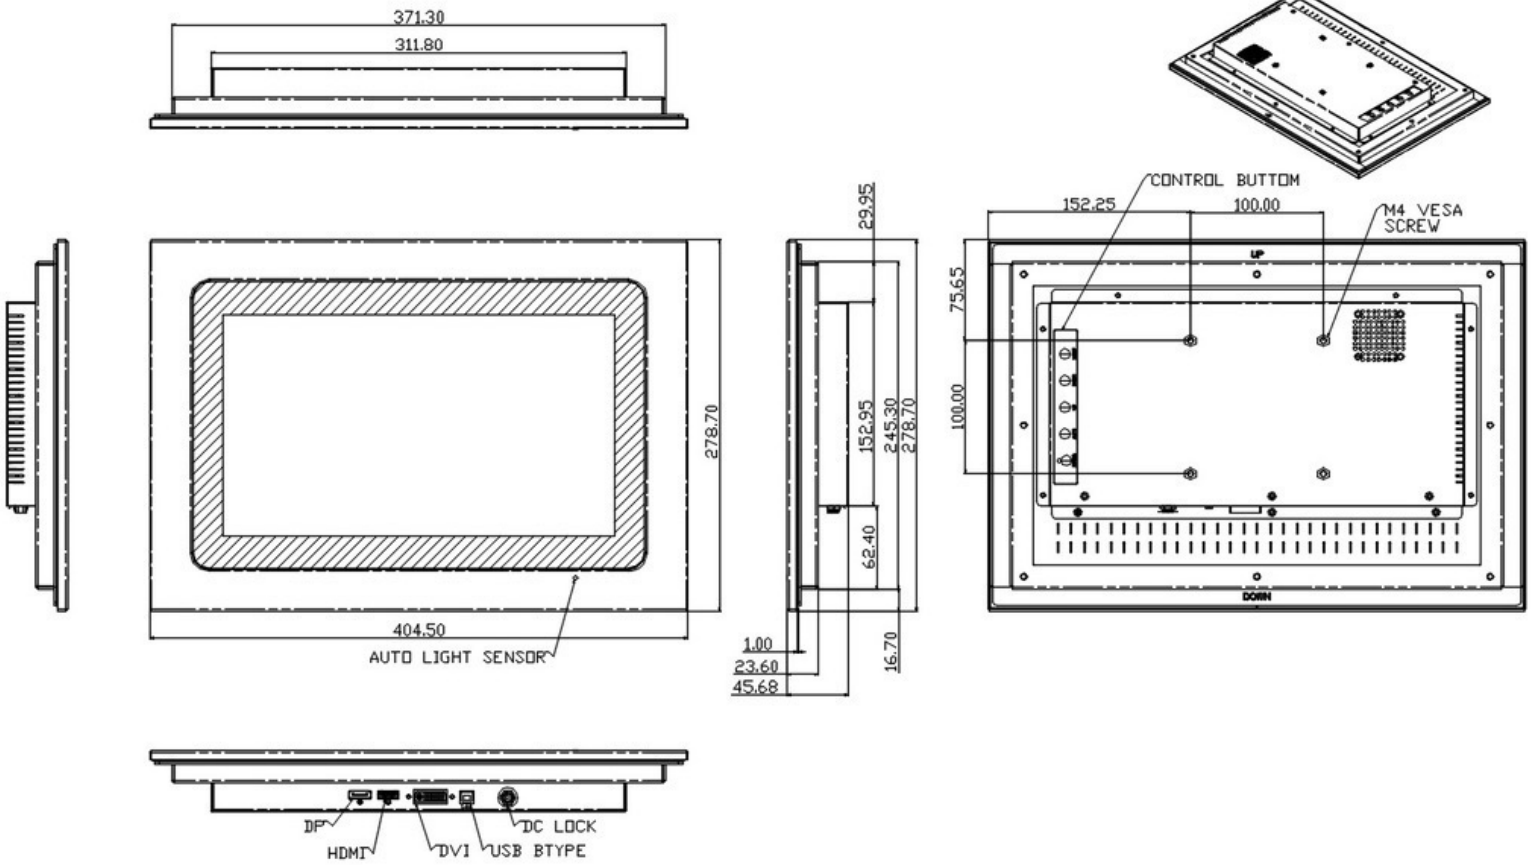

Standard Accessories:

- DVI Cable
- Power Pigtail with Locking Connector

Available Options:

- 90-240 VAC Power Supply
- Waterproof Enclosure
- Private Label