



### MMZTP-15.6G-X Medical-Grade Touch Screen LCD Monitor

- 15.6" HD Surgical-Grade Touch Screen
- Projected Capacitive Touch Screen
- White ABS Rear Enclosure; Zero-Bezel Front
- Meets IEC 60601-1-1; IEC 60601-1-2
- Built-In Speakers
- Auto Re-Start After Power Loss
- 3 Year Warranty

The TRU-Vu MMZTP-15.6G-X is a 15.6" Medical-Grade Projected Capacitive Touch Screen monitor. It conforms to UL 60601-1 Edition 3.1, and IEC 60601-1 4th Edition. The projected capacitive touch technology enables multi-touch; it can be activated via dual fingers that are exposed, or in a surgical glove. The screen is unaffected by dirt, grease or moisture on the glass surface. The sleek edge-to-edge glass front face, without a raised edge bezel, is both stylish and functional: it is easy to clean and eliminates contamination build-up under a bezel, as with standard-type housings. The MMZTP-15.6G-X monitor is ideal for hospital operating rooms, medical carts, fluoroscopy, endoscopy, OEM medical systems, PACS and other medical applications.


TRU-Vu customizable LCD monitors are specifically designed for use in demanding medical, industrial and commercial applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit

#### Specifications

MODEL	MMZTP-15.6G-X
LCD Panel	15.6" Color AHVA; LED Backlights
Touch Screen Type	Projected Capacitive, 10 Touch Points
Number of Touch Points	10
Touch Interface	USB
Resolution	1920 x 1080 (FullHD)
Viewable Area	13.55" W x 7.62" H (344.16 x 193.59 mm)
Pixel Pitch	0.17925mm
Display Colors	16.2 Million
Aspect Ratio	16:9
Brightness	500 nits
Contrast Ratio	1,000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	25 msec Trf
Control	OSD (On-Screen Display) via Pushbuttons
Video Inputs	DVI, HDMI, DisplayPort
Supported Resolutions	640 x 350 up to 1920 x 1080
Audio	Dual Rear Speakers
Power Requirement	90-240VAC via External Medical-Grade Power Supply
Power Consumption	30W
Enclosure	White ABS: Zero-Bezel Design; IP22
Mounting	100mm x 100mm Rear VESA Holes; Optional Tabletop Base
Operating Temperature	14° to 140°F (-10° to 60° C)
Humidity	5-90% RH
Weight	TBD
Dimensions	15.47" (W) x 9.54" (H) x 1.86" (D) (393 x 242.4 x 47.4 mm)
Warranty	3 Years

## MMZTP-15.6G-X

15.6" Medical-Grade Touch Screen LCD Monitor

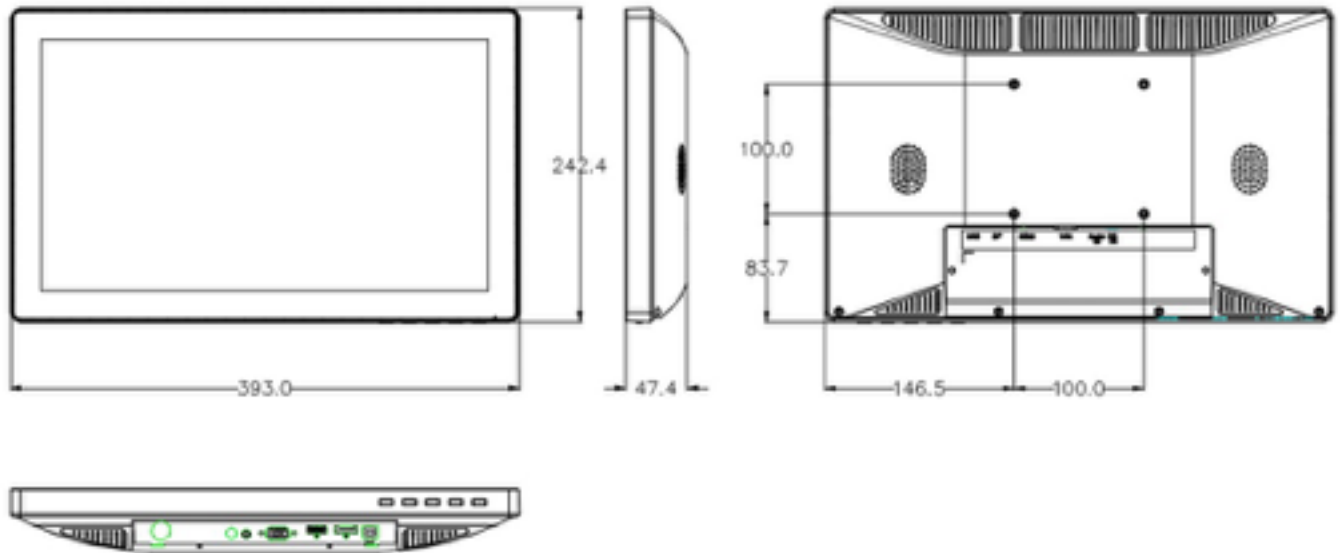

### Standard Accessories:

- External Medical-Grade Power Supply with Hospital-Grade Green Dot Power Cord
- HDMI Cable
- Audio Cable
- USB Cable

### Available Options:

- Tabletop Base
- Anti-Glare Glass
- Wall Mount Brackets
- DICOM Part 14 GSDP Calibration
- Private Label
- Other Customer-Specific Modifications