



### VML-15L Series Customizable Industrial Monitors

- 15" TFT Active Matrix Color LCD
- High Resolution: 1024 x 768 (XGA)
- Video Inputs: VGA, S-Video, DVI-D, Composite, BNC Loop-Thru
- NTSC/PAL Auto-Recognition
- Lockable On-Screen Display Controls
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VML-15L Series monitors offer a variety of video inputs, and are available in standard, open frame, rack mount, and touch screen configurations. An extensive list of available OEM options enables you to customize a solution to your specific needs. The VML-15SL-Z incorporates a high-end image processing board to eliminate typical analog video pixel jitter.


TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit [TRU-VuMonitors.com](http://TRU-VuMonitors.com) for more details.

	Specifications			
MODEL	VML-15SL-Z	VML-15CL	VML-15BL	VM-15BL-DF
LCD Panel	15"Color LCD (LED Backlights)			15" Color LCD (Defect-Free); LED Backlights
Display Resolution	1024 x 768 (XGA)			
Viewable Area	11.97" (W) x 8.98" (H) (304.12 x 228.09 mm)			
Pixel Pitch	0.297mm			
Display Colors	16.2 M			
Aspect Ratio	4:3			
Brightness	250 nits		350 nits	
Contrast Ratio	700:1			
Viewing Angle	170° (H) x 160° (V)			
Response Time	8 msec (gray to gray)			
Control	OSD (On-Screen Display) via Front Panel Pushbuttons			
Video Inputs	VGA, S-Video, Composite (BNC), NTSC/PAL Auto-Recognition	VGA-DVI-D	VGA, Composite (BNC Loop-Thru) NTSC/PAL Auto-Recognition	
Analog Video In / Out	1 BNC Composite Input	---	1 BNC Input/1 BNC Output	
In / Output Impedance	75Ω / Auto Terminating Output			
Audio	Optional			
Power Requirement	12 VDC (90-240 VAC with Included Power Brick)			
Power Consumption	25 Watts			
Enclosure	ABS			
Mounting	Included Base or 75x75mm Rear VESA Mount Holes			
Operating Temperature	+32° to +140° F (0° to +60° C)			
Humidity	8-90% RH			
Shock	50 G (20 msec, 1/2 sine)			
Vibration	1.5G RMS 10-200 HZ			
Approvals	UL/cUL, FCC, CE, TUV, RoHS			
Dimensions	13.66" (W) x 10.87" (H) x 1.78" (D) (347 x 276 x 45.2 mm)			
Weight	5.16 lbs. (2.34 kg)			
Warranty	3-Years			

## VML-15L Series

15" Customizable Industrial LCD Monitors

### Dimensions:

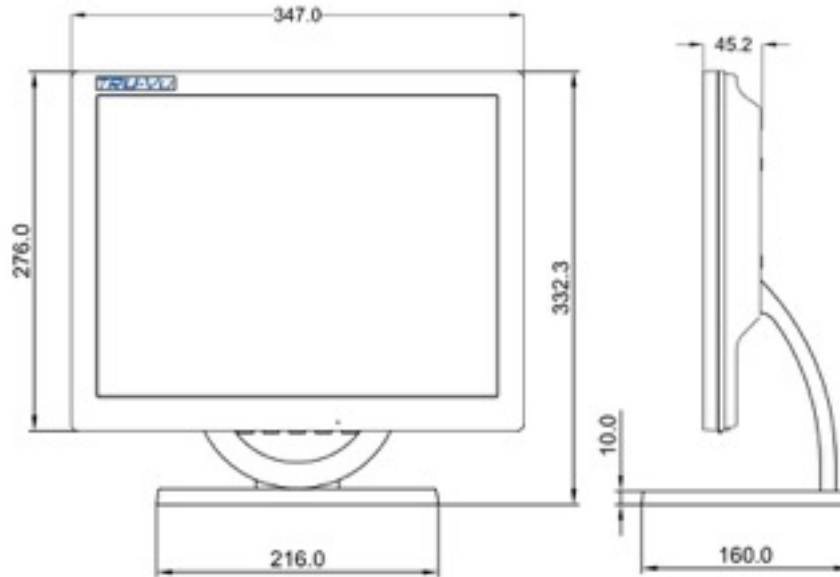

### Standard Accessories:

- 90-240 VAC Power Brick
- Tabletop Stand
- VGA Cable

### Available Options:

- Protective/Anti-Reflective Glass Screen
- 450 Nits Brightness
- Steel Enclosure
- Panel Mount
- Touch Screen
- Rack Mount
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications