



VMT-15 Series

15" Touch Screen LCD Monitors

- 5-Wire Resistive or P-Cap Touch Screen
- High Resolution: 1024 x 768 (XGA)
- LED Backlights
- 250 or 350 Nits Brightness
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty


The VMT-15 Series touch screen monitors are available with 5-Wire Resistive or Projected Capacitive touch screen. The image quality is exceptionally clear and bright; the contact activation point is extremely accurate, and features a USB touch interface. An extensive list of OEM options enables you to customize the VMT-15 Series touch screens to meet your exact needs. These are available with 250 nits or 350 nits brightness.

	Specifications			
MODEL	VMTR-15C-24	VMTR-15C	VMLTR-15CL	ZBTP-15R-M
LCD Panel	15" Color LCD; LED Backlights			
Touch Screen Type	5-Wire Resistive Touch			Projected Capacitive
Touch Interface	USB & RS-232	USB		
Resolution	1024 x 768 (XGA)			
Viewing Area	11.97" (W) x 8.98" (H) (304.128 x 228.096 mm)			
Pixel Pitch	0.297mm			
Display Colors	16.2 M			
Aspect Ratio	4:3			
Brightness	350 nits		250 nits	350 nits
Contrast Ratio	700:1			
Viewing Angle	170° (H) x 160° (V)			160° (H) x 150° (V)
Response Time	8 msec (Trf)			
Control	OSD (On-Screen Display) via Front Panel Pushbuttons			
Video Input	VGA, DVI			VGA, DVI, DisplayPort
Audio	Rear Speakers			No Speakers
Power Requirement	12-24 VDC	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Brick		
Power Consumption	25 Watts			
Enclosure	ABS			Powder Coated Steel, Zero Bezel Front
Mounting	Included Base or 75x75mm Rear VESA Mount Holes	75x75mm Rear VESA Holes	Included Base or 75x75mm Rear VESA Mount Holes	75x75mm Rear VESA Holes
Operating Temp	+32° to 149° F (0° to +65° C)			
Humidity	8-90% RH			
Shock	50 G (20 msec, ½ sine)			
Vibration	1.5G RMS 10-200 HZ			
Approvals	RoHS	UL/cUL,FCC,RoHS		RoHS
Dimensions	13.66" (W) X 10.87" (H) x 1.78" (D) (347 x 276 x 45.20 mm)			14.32" (W) X 10.95" (H) x 1.63" (D) (363.85 x 278.3 x 41.59 mm)
Weight	5.64 lb / 2.56 kg			TBD
Warranty	3 Years			

VMT-15 Series

15" Touch Screen LCD Monitors

Dimensions: (except ZBTP-15R-M)

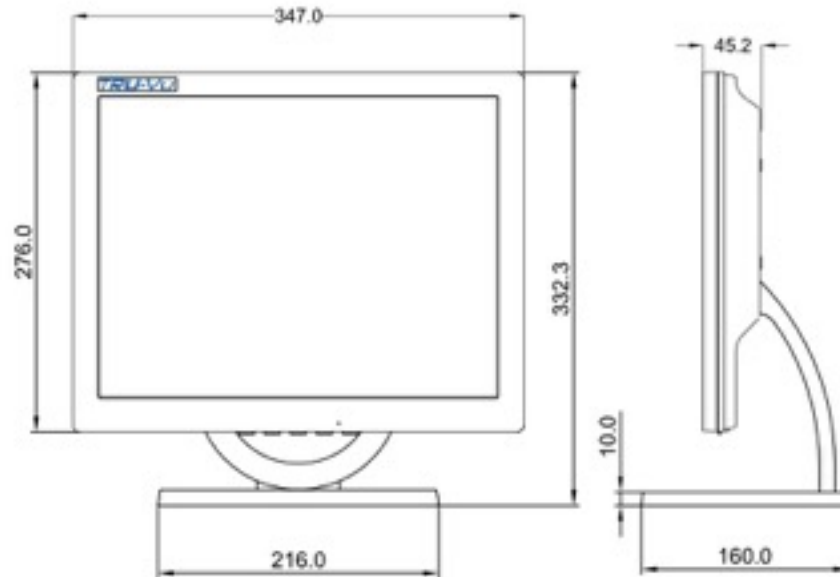

Standard Accessories:

- 90-240 VAC Power Brick (VMTR-15C & VMLTR-15CL only)
- VGA Cable
- Tabletop Base (VMLTR-15CL Only)
- Audio Cable
- DVI Cable
- USB Cable

Available Options:

- AC Power Brick for VMTR-15C-24 (PS-12-LC)
- NEMA 4X Waterproof Stainless Steel Enclosure
- Surface Capacitive Touch Screen
- S.A.W. Touch Screen (VMTS-15C)
- Panel-Mount
- Open-Frame Configuration
- Private Label
- Wall Mount Bracket
- Other Customer - Specific Modifications