



### SRMHTRWP—17 C

#### 17" Waterproof Sunlight Readable Panel-Mount Touch Screen Monitor

- 1,500 nits Brightness
- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 5-Wire Resistive Touch
- Waterproof NEMA 4X Stainless Steel Panel-Mount Enclosure
- Video Inputs: VGA, DVI-D, HDMI
- Operating Temperature: -22 °F to 185 °F (-30 ° to + 85 °C)
- Ambient Light Sensor
- Auto Re-Start After Power Loss
- **TRU-Tuff** Ensures Maximum Shock & Vibration Resistance
- 3 Year Warranty

The SRMHTRWP-17C Sunlight Readable waterproof panel-mount touch screen monitor are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED Backlights to produce 1,000 to 1,500 nits of brightness (vs. 250-300 nits for standard monitors). The 5-wire resistive touch screen can be activated by almost any object — gloved finger, stylus, pen, etc. They are ideal for use outdoors, in wash-down environments, or where liquids, steam or moisture may damage standard monitors. The SRMHTRWP-17C is perfect for use in a wide range of industrial, marine, military, manufacturing, inspection, advertising and transportation applications where viewability in direct, bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

Specifications	
MODEL	SRMHTRWP-17C
LCD Panel	17" Color TN Panel; LED Backlights
Touch Technology	5-Wire Resistive Touch
Touch Interface	USB
Resolution	1280 x 1024 (SXGA)
Viewable Area	13.30" (W) x 10.64" (H) (337.9 x 270.3 mm)
Pixel Pitch	0.264mm
Display Colors	16.7 Million
Aspect Ratio	4:3 (5:4)
Brightness	1,500 nits
Contrast Ratio	1,000:1
Dimming Function	Automatic Ambient Light Sensor
Viewing Angle	160° (H) x 140° (V)
Response Time	30 msec Trf
Video Inputs	VGA, DVI (HDMI via Included Adapter Cable)
Power Requirement	12-24VDC
Power Consumption	TBD
Enclosure	Panel-Mount, Stainless Steel; NEMA 4X Waterproof
Operating	-22° to +185 °F (-30° to +85 °C)
Humidity	5-90% RH
Shock	50 G (20 msec, ½ sine)
Vibration	1.5G RMS 10-200 HZ
Dimensions	16.88" (W) x 14.12" (H) x 2.21" (D) (428.94 x 358.9 x 56.18 mm)
Weight	13.5 lbs. (6.13 kg)
Warranty	3 Years

## SRMHTRWP-17C

17" Waterproof Sunlight Readable Panel-Mount  
Touch Screen Monitor

Dimensions: (mm)

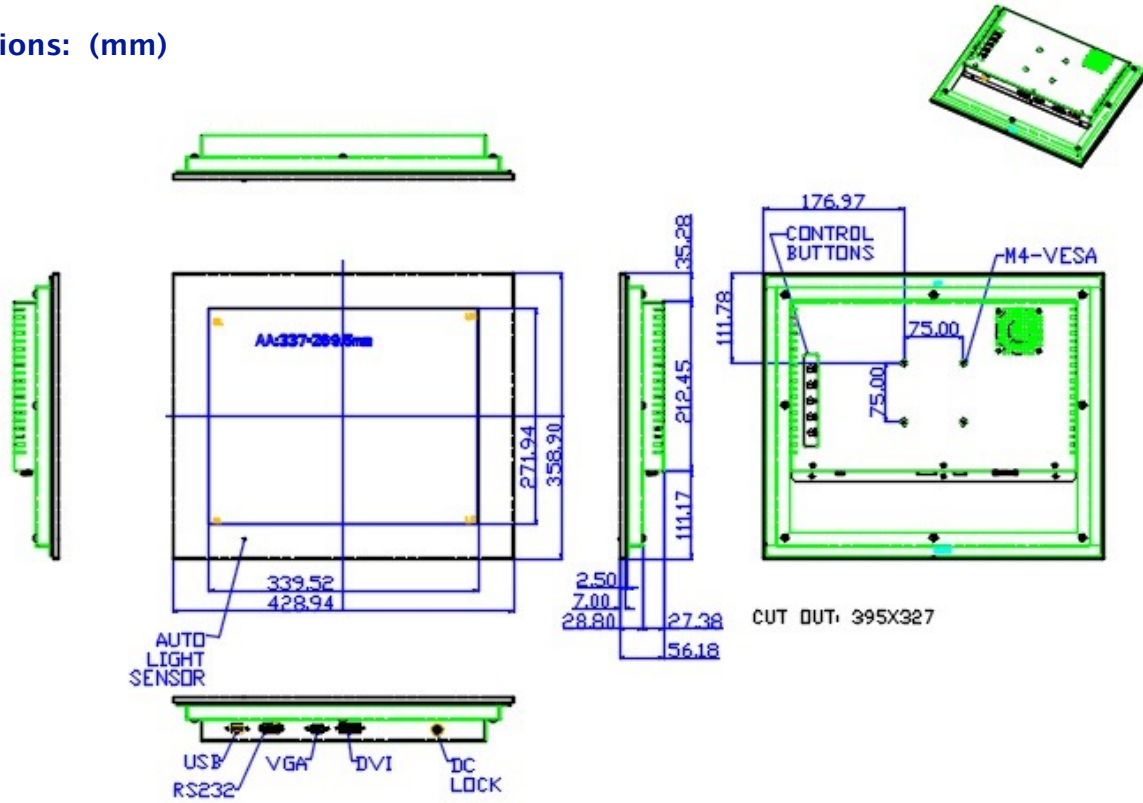

### Standard Accessories:

- VGA Cable
- Power Pigtail Wire
- DVI-to-HDMI Adapter Cable

### Available Options:

- HD-SDI Input
- Private Label
- External AC Power Supply