



### ZBMT-21.5 Series

#### 21.5" HD Multi-Touch Touch Screen LCD Monitor

- Projected Capacitive Touch Technology
- Can Be Activated Via Exposed Finger, and Surgical or Thin Cotton Gloves
- Zero-Bezel, Seamless, All-Glass Front Face
- Sleek Design, Easy to Clean
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Dual Built-in Speakers (Rear)
- Auto Re-Start After Power Loss
- Can Be Customized To Meet Your Needs
- Lockable On-Screen Display (OSD) Controls
- 3 Year Warranty

The ZBMT-21.5 Series projected capacitive, multi-touch, Zero-Bezel touch screen monitors offer the latest in LCD touch screen technology. The projected capacitive touch technology can be activated via an exposed finger (like standard capacitive touch), and also a finger inside a surgical glove or thin cotton glove. The multi-touch capability allows simultaneous dual finger operation for selecting, zoom, flick and other functions. It is also unaffected by dirt, grease or moisture on the glass surface. The sleek all-glass, seamless, zero-bezel front face is stylish as well as functional; it is easy to clean and eliminates the potential for contamination build-up under the bezel. The thin black housing finishes off the elegant look, and is perfect for healthcare, kiosk, hospitality and other applications.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

	Specifications		
MODEL	ZBMT-21.5G-X	ZBMT-21.5R	ZBMT-21.5R-120
LCD Panel	21.5" Color LCD; LED Backlights		
Touch Screen Type	Projected Capacitive Touch		
Display Resolution	1920 x 1080 (1080p/60 Full HD)		
Viewable Area	18.76" x 10.55" (476.6 x 268.1 mm)		
Pixel Pitch	0.248mm		
Display Colors	16:7 M		
Aspect Ratio	16:9		
Brightness	250 nits		
Contrast Ratio	5,000:1		
Viewing Angle	178° (H) x 178° (V)		
Response Time	12 ms Trf		
Control	OSD (On-Screen Display) via Pushbuttons		
Video Inputs	HDMI, DVI, DisplayPort	VGA, HDMI, DisplayPort	
Audio	Dual Rear Speakers		
Power Requirement	12VDC / 90-240 VAC	12 VDC (2.1mm Barrel Plug) 90-240 VAC	90-240 VAC
Power Consumption	Max. 22W at 12 VDC/2.1A		
Enclosure	ABS, Zero-Bezel Front Face		
Mounting	100 x 100 mm VESA and Included Tabletop Base		
Operating Temperature	32° to 122° F (0 to 50° C)		
Humidity	5-90% Non-Condensing		
Shock	50G, Half-sine Wave, 20msec X/Y/Z		
Vibration	1.56 RMS, Random Wave; 10-200Hz; 30 mins per axis (X,Y,Z)		
Dimensions	20.68" (W) x 12.61" (H) x 2.20" (D) (525.3 x 320.3 x 55.8 mm)		
Weight	9.26 lbs. (4.20kg)		
Warranty	3 Years		

## ZBMT-21.5 Series

21.5" HD Multi-Touch Touch Screen LCD Monitor

Dimensions: (mm)

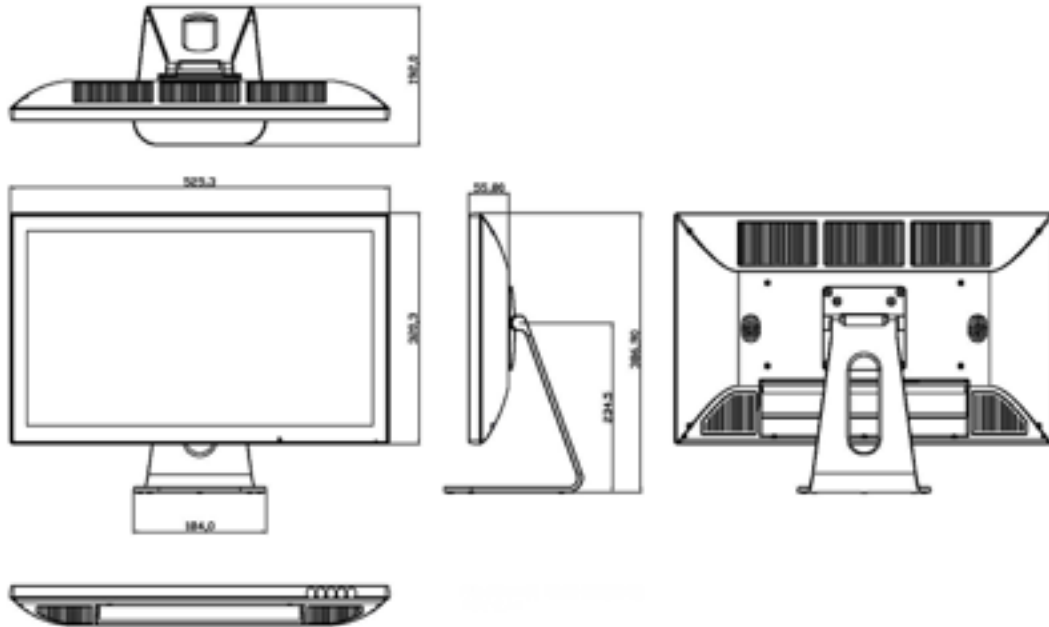

### Standard Accessories:

- 90-260 VAC Power Brick (Except ZBMT-21.5C-120)
- Tabletop Stand
- DVI Cable (ZBMT-21.5C & ZBMT- 21.5C-120 only)
- VGA Cable
- HDMI Cable (ZBMT-21.5R Series only)
- USB Cable
- Audio Cable
- HDMI-DVI Adapter

### Available Options:

- Protective/Anti-Reflective Glass
- Private Label
- Other Customer – Specific Modifications