



SRMTPW-24R-AL

24" Sunlight Readable Waterproof Touch Screen Monitor

- 1,000 Nits Brightness
- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- Projected Capacitive Touch
- NEMA 4X Waterproof Aluminum Enclosure
- Video Inputs: VGA, HDMI, DisplayPort
- Ambient Light Sensor
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The SRMTPW-24R-AL 24" Sunlight Readable touch screen monitors with waterproof enclosure are designed for use in direct bright sunlight, or other high ambient light environments. The 1,000 nits of brightness ensure bright, crystal-clear images. Projected Capacitive touch technology can be activated via an exposed finger, and also when using thin latex or cotton gloves. The multi-touch capability allows up to 10 simultaneous finger operation for selecting, zoom, flick and other functions. It is also unaffected by dirt, grease or moisture on the glass surface.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

	Specifications
MODEL	SRMTPW-24R-AL
LCD Panel	24" Color LCD; LED Backlights
Display Resolution	1920 x 1080 (Full HD)
Touch Screen Type	Projected Capacitive
Touch Interface	USB
Viewable Area	20.92" (W) x 11.76" (H) (531.4 x 298.9 mm)
Pixel Pitch	0.277 mm
Display Colors	16:7M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	5,000:1
Viewing Angle	178°(H) x 178°(V)
Response Time	25 ms
Control	OSD (On-Screen Display) via Rear Pushbuttons
Video Inputs	VGA, HDMI, DisplayPort
Power Requirement	9-36VDC (2.5 mm Locking Barrel Plug Connector)
Power Consumption	42W
Enclosure	NEMA 4X Aluminum
Mounting	100 x 100 mm Rear VESA Mount Holes
Operating Temperature	-4° to 158°F (-20° to +70°C)
Humidity	5-90% RH
Shock	50G Half-sine
Vibration	1.5G RMS 10-200Hz
Dimensions	22.68" (W) x 13.55" (H) x 2.38" (D) (576 x 344.2 x 60.5 mm)
Weight	12.73 lbs. (5.77 kg)
Warranty	3 Years

SRMTPW-24R-AL

24" Sunlight Readable Waterproof Touch Screen Monitor

Dimensions:

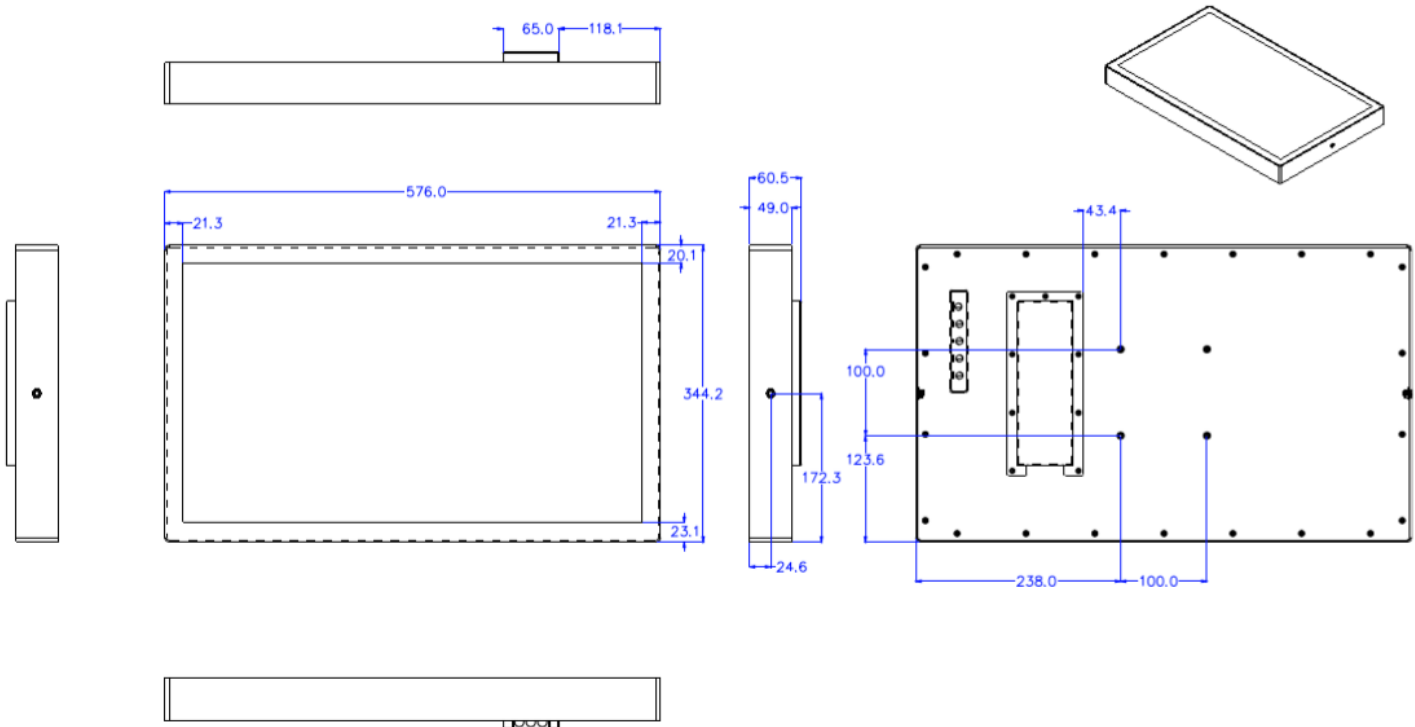

Standard Accessories:

- USB Cable
- Power Pigtail with Locking Connector

Available Options:

- AC Adapter
- DVI Input
- HD-SDI Input
- Private Label
- Other Customer-Specific Modifications