



### SRMHTWP-10.4 Series 10.4" Sunlight Readable Waterproof Panel-Mount Touch Screen Monitors

- Produce Clear, Sharp Images Even in Direct Bright Sunlight
- 5-Wire Resistive Touch
- 1,500 Nits Brightness
- Stainless Steel Panel-Mount Enclosure
- NEMA 4X / IP65 Waterproof Front Face
- Automatic Ambient Light Sensor
- Auto Re-Start After Power Loss
- Lockable On-Screen Display Controls
- 3 Year Warranty


The SRMHTWP-10.4 Series Sunlight Readable Waterproof Panel-Mount Touch Screens are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,500 nits of brightness (vs. 250-300 nits for standard monitors). The waterproof panel-mount enclosure enables installation in wash down or wet environments. The Ambient Light Sensor brightens or dims the screen as needed, depending upon ambient light conditions. The SRMHTWP-10.4 Series Sunlight Readable Waterproof Panel-Mount Touch Screens are ideal for use in a wide range of industrial, marine, military, manufacturing, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

	Specifications		
MODEL	SRMHXTRWP-10.4C	SRMHXTRWP-10.4H	SRMHTRWP-10.4V
LCD Panel	10.4" Color MVA LCD Panel (LED Backlights)		
Touch Technology	5-Wire Resistive Touch		
Touch Interface	USB		
Resolution	1024 x 768 (XGA)		800 x 600 (SVGA)
Viewable Area	8.31" (W) x 6.24" (H) (211.2 x 158.4 mm)		
Pixel Pitch	0.2055 mm		
Display Colors	16.2 M		
Aspect Ratio	4:3		
Brightness	1,500 nits		
Contrast Ratio	3,000:1		
Response Time	15 msec Trf		
Viewing Angle	178° (H) x 178° (W)		
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons		
Video Inputs	VGA, DVI	VGA & HDMI	VGA
Power Requirement	12-24VDC		
Power Consumption	17W		13W
Enclosure	Stainless Steel Panel-Mount (Rear Clamp)		
Rating	NEMA 4X / IP65 Front Face		
Operating	-22 °F to +176 °F (-30 °C to +80 °C)		
Humidity	8-90%RH		
Shock	50 G (20 msec, ½ sine)		
Vibration	1.5G RMS 10-200 HZ 30 mins/axis (X,Y,Z)		
Dimensions	12.57" (W) x 9.87 (H) /319.20 x 250.70 mm (Cut-Out: 285 x 218mm)		
Warranty	3 Years		

## SRMHTWP-10.4 Series 10.4" Sunlight Readable Waterproof Panel-Mount Touch Screen Monitors

Dimensions: (mm)

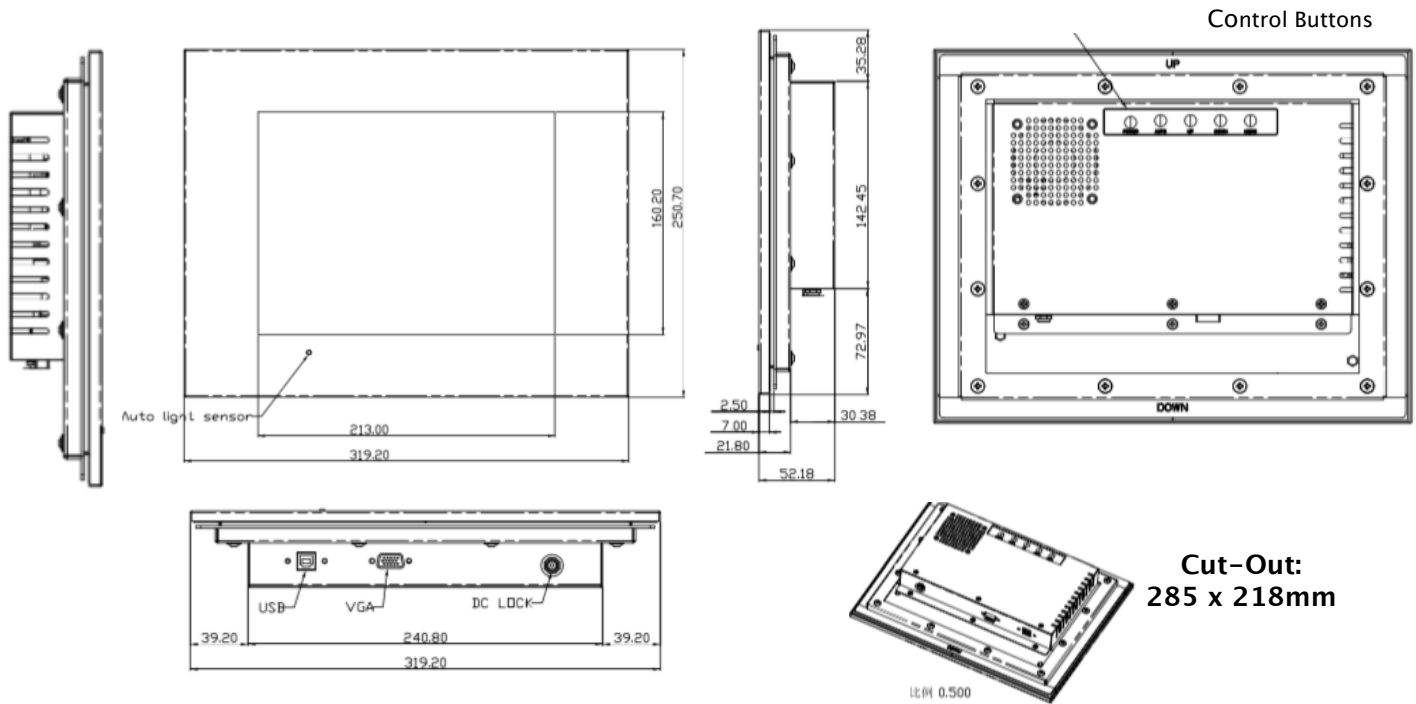

### Standard Accessories:

- VGA Cable
- Locking Power Pigtail

### Available Options:

- DVI Input
- HD-SD Input
- Private Label
- Other Customer - Specific Modifications