

SRMHTR-13.3R

13.3" High Bright Resistive Touch Screen

- 1,500 nits Brightness
- 5-Wire Resistive Touch Screen
- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- Extended Operating Temperatures
- Steel Enclosure with On-Screen Display (OSD) Controls via Back Panel Pushbuttons
- Auto Re-Start After Power Loss
- Fan-Less Thermal Pad for Internal Cooling
- *TRU-Tuff* Ensures Maximum Shock and Vibration Resistance
- Can Be Customized to Meet Your Needs
- 3-Year Warranty



HIGH BRIGHT TOUCH SCREEN PANEL 13.3"

The SRMHTR-13.3R are 13.3 sunlight readable touch screen monitors. Featuring high bright resistive touch, with at least 1500 nits brightness, and a 16:9 aspect ratio. We design the SRMHTR-13.3R monitors for use in direct sunlight. Consequently, they are also perfect for other high ambient-light conditions. They utilize state-of-the-art LED backlights. In contrast, this is over 3 to 5 times brighter than standard monitors. For example, standard monitors are only 200-300 nits brightness. Therefore, the result is an amazingly bright screen. This will provide you with crystal-clear images, even with bright, direct sunlight on the face of the screen. It also features an Ambient Light Sensor to ensure optimal image quality in any ambient light conditions.

RUGGED INDUSTRIAL TOUCHSCREENS; FAN-LESS MONITORS

The SRMHTR-13.3R 13.3" sunlight readable touch monitors are extremely rugged. For instance, we build them with true industrial-grade components. Furthermore, they receive our exclusive TRU-Tuff treatment. The TRU-Tuff process includes RTV silicone on all connections and critical components. Additionally, all wires are dressed, tie-wrapped and secured. Lastly, we apply ThreadLock to all screws. The Painted Black Steel enclosure will ensure maximum shock and vibration resistance for this rugged 1500 nits brightness monitor. They operate on 9-36 VDC. The unique fan-less design incorporates an internal heat sink and thermal pad to maintain internal temperatures. The benefit is higher long-term reliability (no fan failure) and superior performance in dirty environments.

13" TOUCH SCREEN WITH EXTREME OPERATING TEMPERATURES

We design the SRMHTR-13.3R 13.3 sunlight readable touch to operate in nearly any environmental conditions. Whether in frigid conditions or blazing heat, these sunlight displays will survive and thrive. To clarify, these monitors will operate in temperatures down to -4°F (-20°C). They will also withstand brutal heat, with operating temperatures up to 158°F (+70°C). The steel enclosures assure these 13.3" high brightness touch screens will provide years of reliable imaging performance. Specifically, typical MTBF for these monitors is 50,000 hours.

13" TOUCHSCREENS DEPLOYED WORLDWIDE

Our 13.3" high bright resistive touch screen monitors have been deployed in a wide range of demanding industries. For example, military, law enforcement, industrial manufacturing, aviation and entertainment benefit. They are also found in inspection, kiosks, heavy equipment, and transportation. TRU-Vu monitors are backed by our full 3-Year Warranty. This

ensures you of many years of reliable service.

FIND THE BEST 13 INCH SUNLIGHT READABLE TOUCH SCREEN FOR YOUR APPLICATION

With over 200 LCD monitors and touch screens on our site, selecting the ideal equipment, or touch screen solution may be a bit overwhelming. To help narrow-down the choices, check out our Advanced Search Tool. For example, this enables you to filter by your own specific search requirements. We specialize in providing Sunlight Readable monitors and touch-screens for challenging environments. However demanding your application may be, we will provide the very best solution. View all Touch Screen Displays.

Our vast client base shows our versatility in providing the very best Sunlight Readable Monitors in the industry. What is a sunlight readable monitor? To learn even more- watch this video. Custom OEM LCD Displays and Private Label Monitors are also an option if you have very specific requirements, or visit our wide range of LCD monitor mounts and stands to complete your installation.

Finally, our team members are ready to help! We can determine the exact solution that will meet your specific needs. Certainly, TRU-Vu will help provide crystal-clear images for your operating requirements. Call (847) 259-2344 today to speak with one of our specialists. Above all, we will listen. It's one of the things we do best. Our professional advisors will ensure the monitor or touch screen you receive will be and do everything you had hoped it would!

If you prefer, fill out a quick form with your requirements, and we will guide you to the proper models that will work best.

SPECIFICATIONS


	SRMHTR-13.3R
LCD Panel	13.3" AHVA Panel; LED Backlights
Touch Screen	5 Wire Resistive Touch Screen
Touch Interface	USB
High Retention USB	Standard
Display Resolution	1920 x 1080 (1080P/60 Full HD)
Viewable Area	11.55" (W) x 6.50" (H) (293.472 x 165.078 mm)
Pixel Pitch	0.15285mm
Display Colors	16.7 M
Aspect Ratio	16:9
Brightness	1,500 nits
Ambient Light Sensor	Standard
Contrast Ratio	800:1
Viewing Angle	178° (H) x 178° (V)
Response Time	25msec Trf
Control	OSD (On-Screen Display) via Back Pushbuttons
Video Inputs	VGA, HDMI, DisplayPort
Power Requirements	9-36 VDC with Phoenix Contact Power Connector
Power Consumption	23W
Enclosure	Painted Black Steel (no vent holes on top)
Mounting	75 x 75 and 100 x 100 VESA Mount Holes
Internal Cooling	Thermal Pad (no fan)
Operating Temp.	-4° to +158° F (-20° to +70° C)
Humidity	5-90% RH
Shock	50 G (20 msec, 1/2 sine)
Vibration	1.5G RMS 10-200 HZ

	SRMHTR-13.3R
Dimensions	12.40" (W) x 7.80" (H) x 1.63" (D) (314.9 x 198 x 46.4 mm)
Weight	4 Lbs (1.81 kg)
Warranty	3 Years

Note: Specifications subject to change without notice.

DIMENSIONS (MM)

Model Name : SRMHTR-13.3R

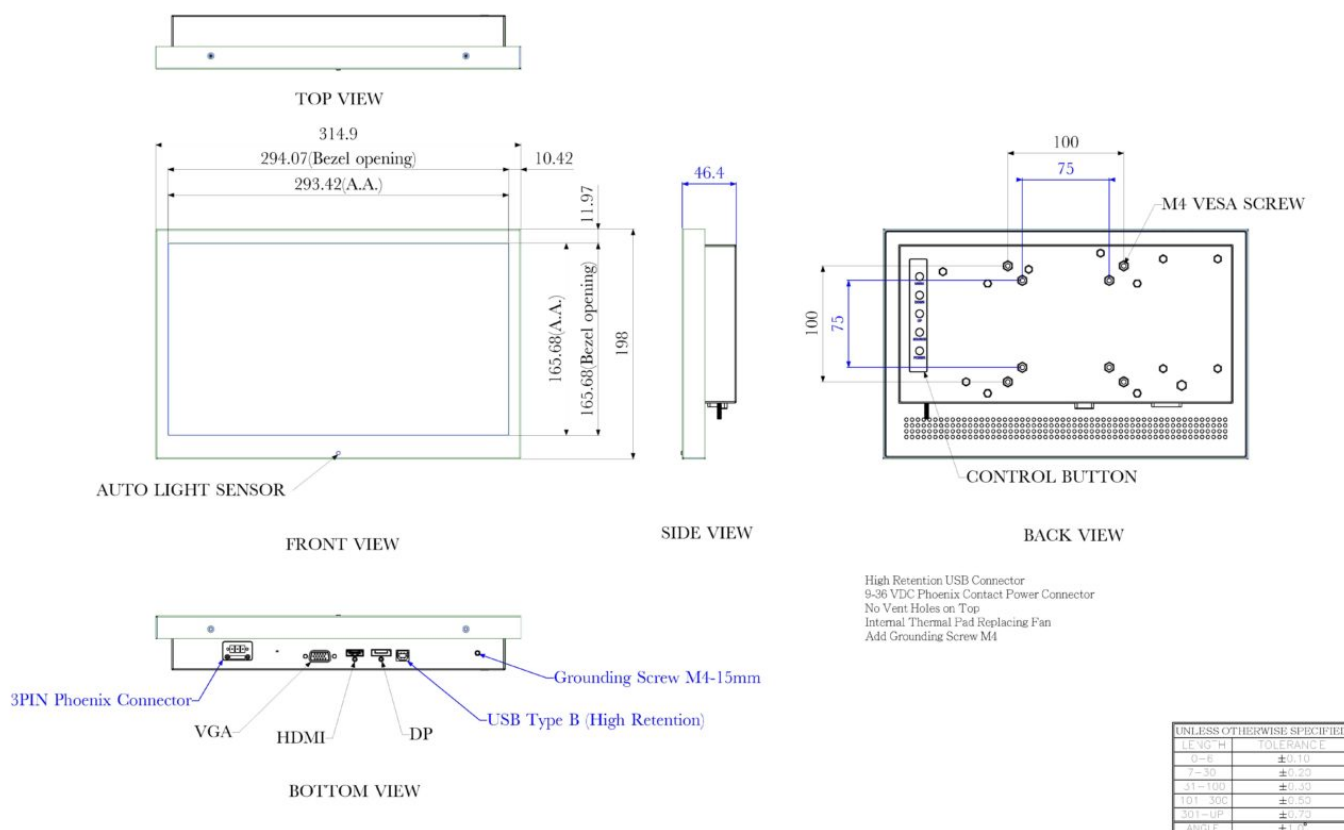

SRMHTR-13.3R

Standard Accessories:

- Phoenix Contact Power Connector
- HDMI and USB Cable

Available Options:

- AC Adapter (PS-12-LC)
- Projected Capacitive Touch Screen (SRMHTP-13.3GDA)
- Composite BNC Input (SRMHTP-13.3U)
- Open-Frame Configuration (SRMHTP-13.3G-OF)

- Stainless Steel NEMA 4X Waterproof Enclosure (SRMHTPW-13.3U)
- Optical Bonding
- Tabletop Base
- Wall Mount Bracket
- Panel Mount Enclosure
- Other Customer – Specific Modifications