

## SRMTR-10.4V

### 10.4 Sunlight Readable Touch Screen

- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 1,000 nits Brightness
- 5-Wire Resistive Touch Screen
- LED Backlights
- TRU-Tuff Ensures Maximum Shock/Vibration Resistance
- Lockable OSD (On-Screen Display) Controls
- 3-Year Warranty
- TAA Compliant



## 10.4 SUNLIGHT READABLE TOUCH SCREEN - HIGH BRIGHTNESS TOUCH SCREEN

The SRMTR-10.4V are 10.4 sunlight readable touch screens. They feature at least 1000 nits brightness and a 4:3 aspect ratio. We design the SRMTR-10.4V monitors for use in direct sunlight. Consequently, they are also perfect for other high ambient-light conditions. They utilize state-of-the-art LED backlights. The models in this series produce at least 1,000 nits brightness. In contrast, this is over 3 to 5 times brighter than standard monitors. For example, standard monitors are only 200-300 nits brightness. Therefore, the result is an amazingly bright screen. This will provide you with crystal-clear images, even with bright, direct sunlight on the face of the screen.

### RUGGED INDUSTRIAL TOUCH SCREEN MONITORS

The SRMTR-10.4V 10.4 sunlight readable touch screens are extremely rugged. For instance, we build them with true industrial-grade components. Furthermore, they receive our exclusive TRU-Tuff treatment. The TRU-Tuff process includes RTV silicone on all connections and critical components. Additionally, all wires are dressed, tie-wrapped and secured. Lastly, we apply ThreadLock to all screws. The steel enclosure will ensure maximum shock and vibration resistance for this rugged 1000 nits brightness monitor.

### EXTREME OPERATING TEMPERATURE 10.4" TOUCH SCREEN

We design the SRMTR-10.4V 10.4" Sunlight Readable touch screen monitors to operate in nearly any environmental conditions. Whether in frigid conditions or blazing heat, these sunlight displays will survive and thrive. To clarify, these monitors will operate in temperatures down to -22°F (-30°C). They will also withstand brutal heat, with operating temperatures up to 140°F (60°C). The rugged steel enclosure assures these 10.4" high brightness touch screens will provide years of reliable imaging performance. Specifically, typical MTBF for these monitors is 50,000 hours.

### SUNLIGHT READABLE MONITORS ARE DEPLOYED WORLDWIDE

Our 10.4" high brightness touch screen monitors have been deployed in a wide range of demanding industries. For example, military, law enforcement, industrial manufacturing, aviation and entertainment benefit. They are also found in inspection, kiosks, heavy equipment, and transportation. TRU-Vu monitors are backed by our full 3-Year Warranty. This ensures you of many years of reliable service.

### OUR TECHNICAL EXPERTS ARE READY TO HELP YOU FIND THE BEST DISPLAY

With over 200 LCD monitors and touch screens on our site, selecting the ideal equipment, or touch screen solution may be a bit overwhelming. To help narrow-down the choices, check out our [Advanced Search Tool](#). This enables you to filter by your

own specific important features. See all of our daylight viewable and sunlight readable monitors, or sort by size of 7-12" monitors. View all of our 24VDC monitors and touch screens. TRU-Vu Monitors also offers a wide range of LCD monitor mounts and stands. Custom OEM LCD Displays and Private Label Monitors are also an option if you have very specific requirements.

We specialize in providing Sunlight Readable monitors and touch-screens for challenging environments. However demanding your application may be, we will provide the very best solution. Our vast client base shows our versatility in providing the very best Sunlight Readable Monitors in the industry. What is a sunlight readable monitor? To learn even more- watch this video.

Finally, our team members are ready to help! We can determine the exact solution that will meet your specific needs . Certainly, TRU-Vu will help provide crystal-clear images for your operating requirements . Call (847) 259-2344 today to speak with one of our specialists. Above all, we will listen. It's one of the things we do best. Our professional advisors will ensure the monitor or touch screen you receive will be and do everything you had hoped it would!


If you prefer, fill out a quick form with your requirements, and we will guide you to the proper models that will work best.

## SPECIFICATIONS

|                       | <b>SRMTR-10.4V</b>   |
|-----------------------|--|
| LCD Panel             | 10.4" Color LCD; LED Backlights                                  |
| Touch Screen Type     | 5-Wire Resistive Touch   |
| Touch Interface       | USB  |
| Resolution            | 800 x 600 (SVGA)   |
| Display Area          | 8.31" (W) x 6.24" (H) (211.2 x 158.4 mm)                         |
| Pixel Pitch           | 0.264 mm   |
| Display Colors        | 16.2M  |
| Aspect Ratio          | 4:3  |
| Brightness            | 1,000 nits   |
| Contrast Ratio        | 700:1  |
| Viewing Angle         | 160° (H) x 130° (V)  |
| Response Time         | 15 msec  |
| Control               | OSD (On-Screen Display) via Rear Panel Pushbuttons               |
| Video Inputs          | VGA  |
| Power Requirement     | 12VDC (2.1mm Barrel Plug);<br>90-240VAC via Included Power Brick |
| Power Consumption     | 13W (1.08 A @ 12VDC)   |
| Enclosure             | Painted Steel  |
| Mounting              | 75 x 75mm Rear VESA Mount Holes (M4 x 6mm Screws)                |
| Operating Temperature | -22° to +140°F (-30° to +60°C)                                   |
| Humidity              | 5 - 90% RH   |
| Shock                 | 50G, 20ms, Half-sine wave  |
| Vibration             | 1.5G (10-200 Hz, P-P) 30 mins./axis (X,Y,Z)                      |
| Dimensions            | 10.13 " (W) x 7.96" (H) x 1.73 (D) (257.4 x 202.2 x 44 mm)       |
| Weight                | 3.8 lbs. (1.63 kg)   |

Note: Specifications subject to change without notice.

**DIMENSIONS (MM)**

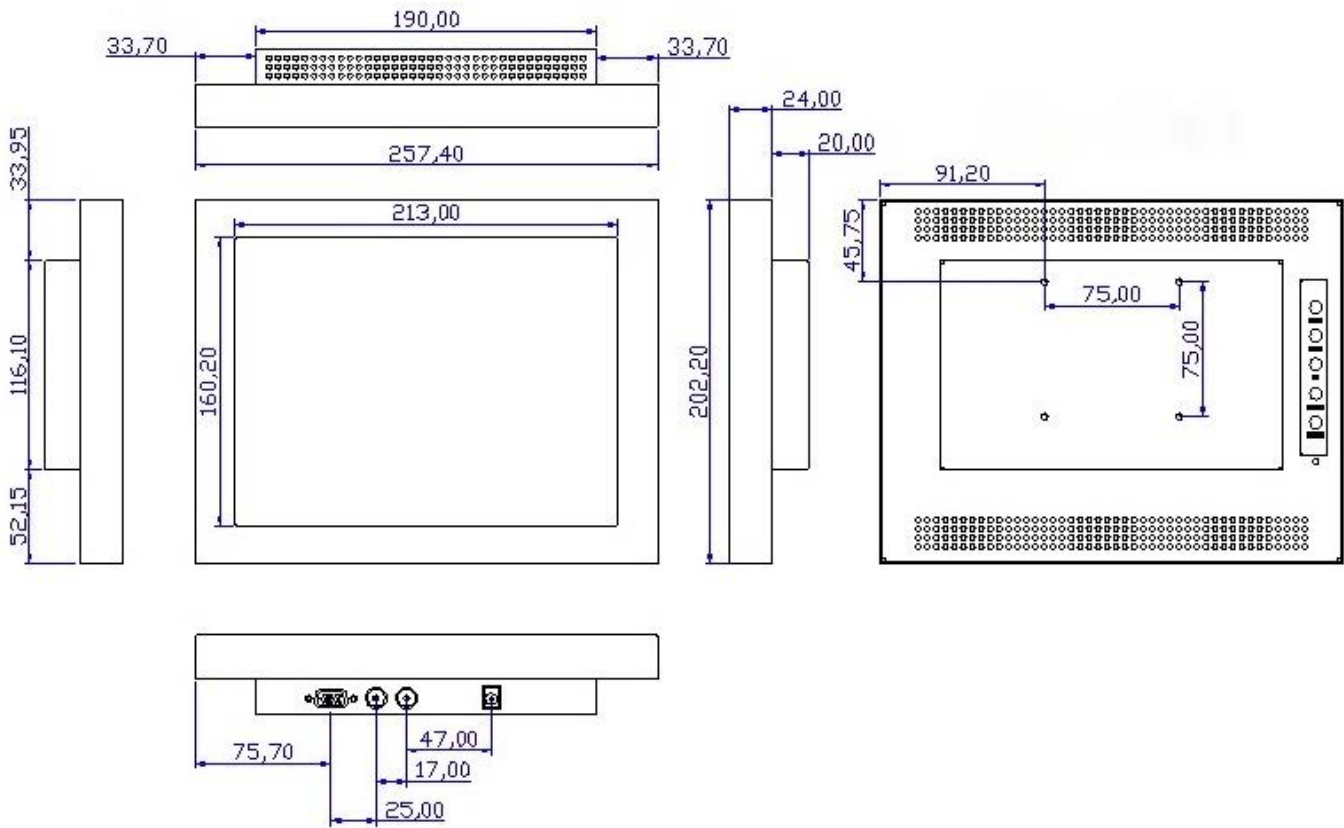

**Standard Accessories:**

- 90-240 VAC Power Brick (SRMTR-10.4V only)
- Locking Pigtail for DC Power (E24 Model Only)
- USB Cable

**Available Options:**

- 90-240 VAC via PS-12 Power Supply
- Automated Ambient Light Sensor
- 1,500 Nits Brightness
- Move OSD Control Buttons onto Front Bezel
- -30° to +85°C Operating Temperature
- DVI or HDMI Video Input
- NEMA 4X Waterproof Stainless Steel Enclosure
- Panel Mount
- Open-Frame Configuration
- Optical Bonding
- Projected Capacitive Touch Screen
- Other Customer - Specific Modifications