



SRMH-15-AR Series

15" Sunlight Readable Monitors

- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- 1,700 nits Brightness
- Anti-Reflective Coating
- LED Backlights
- High Shock & Vibration Resistance
- Lockable On-Screen Display Controls
- Dim-to-Black Function Via Front Pushbuttons
- 3 Year Warranty

The SRMH-15-AR Series Sunlight Readable LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,700 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRMH-15-AR Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising, material handling (cranes) and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.


Specifications

MODEL	SRMH-15S-AR	SRMH-15B-AR
LCD Panel	15" Color TFT LCD Monitor	
Resolution	1024 x 768 (XGA)	
Backlights	LED	
Viewable Area	11.97"(W) x 8.98"(H) (304.03 x 228.09 mm)	
Pixel Pitch	0.297mm x 0.297mm	
Display Colors	16.2 Million	
Aspect Ratio	4:3	
Brightness	1,700 nits	
Contrast Ratio	700:1	
Viewing Angle	170° (H) x 160° (V)	
Response Time	8 msec Trf	
Control	OSD (On-Screen Display) via Front Panel Pushbuttons	
Video Inputs	VGA, S-Video, Composite (BNC) NTSC/PAL Auto-Recognition	VGA, Composite BNC Loop-Thru (1 input, 1 output) NTSC/PAL Auto-Recognition
In/Output Impedance	75Ω/Auto Terminating Output	
Power Requirement	12 VDC (90-240 VAC with Included Power Brick)	
Power Consumption	50 Watts	
Enclosure	ABS	
Mounting	Via Included Tabletop Base or Via 75x75mm	Via 75mm Rear VESA Hole Pattern
Operating	-22° to 185°F (-30° to 85° C)	
Humidity	5-90% RH	
Shock	50 G (20 msec, 1 / 2 sine)	
Vibration	1.5G RMS 10-200 HZ	
Dimensions	13.7"(W) x 10.9"(H) x 1.5"(D) (347.97(W) x 276.86(S) x 38.09(D) mm)	
Weight	4.9 lbs. (2.22 kg)	

SRMH-15-AR Series

15" Sunlight Readable LCD Monitors

Dimensions:

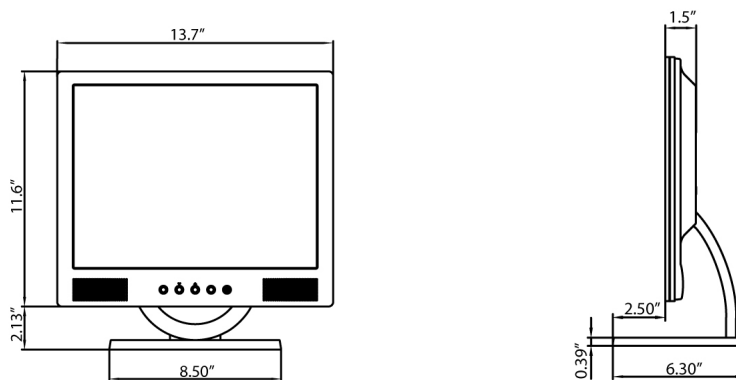

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base (on "S" Model; optional on "B" Model)

Available Options:

- Tabletop Base
- DVI Video Input
- Internal Speakers
- Panel Mount
- Rack Mount
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications