

## SRMW-17Z-36

### 17" Waterproof Sunlight Readable LCD Monitor

- <ul>
- <li>1,000 nits Brightness – Produces Clear, Sharp Images Even in Direct, Bright Sunlight</li>
- <li>Waterproof NEMA 4X Stainless Steel Enclosure</li>
- <li>Video Inputs: VGA, HDMI, BNC Loop Thru, HD-SDI</li>
- <li>Operating Temperature: -22°F to 185°F (-30° to + 85°C)</li>
- <li>Dim-To-Black Function with Auto Re-Start After Power Loss</li>
- <li><em><strong>TRU-Tuff</strong></em> Ensures Maximum Shock & Vibration Resistance</li>
- <li>3-Year Warranty</li>
- <li>TAA Compliant</li>
- </ul>



## 17" WATERPROOF SUNLIGHT SCREEN

The SRMW-17Z-36 are 17" waterproof sunlight screen displays. They feature at least 1000 nits brightness. Additionally, this particular model has a 4:3 aspect ratio. We design this 17" 1,000 nits display for use in direct bright sunlight. Consequently, they are also perfect for other high ambient-light conditions. They utilize state-of-the-art LED backlights. This display produces at least 1,000 nits brightness. In contrast, this is over 3 to 5 times brighter than standard monitors. For example, standard monitors are only 200-300 nits brightness. Therefore, the result is an amazingly bright screen. This will provide you with crystal-clear images, even with bright sunlight on the face of the screen. For nighttime use, the Dim-To-Black function will enable users to dim the brightness of the monitor as needed via front OSD buttons.

## RUGGED OUTDOOR MONITORS

These 17" sunlight readable waterproof displays are extremely rugged. For instance, we build them with true industrial-grade components. Furthermore, they receive our exclusive TRU-Tuff treatment. The TRU-Tuff process includes RTV silicone on all connections and critical components. Additionally, all wires are dressed, tie-wrapped and secured. Furthermore, we apply ThreadLock to all screws. Lastly, the rugged NEMA 4X Waterproof stainless steel enclosure ensures maximum shock and vibration resistance.

### 17" WATER PROOF MONITOR

These monitors feature a rugged waterproof NEMA 4X stainless steel enclosure. It is impervious to liquids, rust or corrosion. It is rated NEMA 4X, and features protective Anti-Reflective glass over the LCD panel. The 17" outdoor monitors will withstand the elements outdoors. It will also endure wash-downs in industrial and food processing plants. For instructions on maintaining water tight integrity, follow these procedures: [Cable Entry for TRU-Vu Waterproof Monitors \(PDF\)](#)

### HIGH BRIGHTNESS DISPLAY WITH EXTREME OPERATING TEMPERATURES

We design the SRMW-17Z-36 high brightness display to operate in nearly any environmental conditions. Whether in frigid conditions or blazing heat, these sunlight displays will survive and thrive. To clarify, some of these monitors will operate in temperatures down to -22°F (-30°C). They will also withstand brutal heat. Moreover, operating temperatures go up to +185°F (+85°C). The rugged stainless steel NEMA 4X waterproof enclosure assures years of reliable imaging performance. Specifically, typical MTBF for these monitors is 50,000 hours.

## OUTDOOR MONITORS DEPLOYED WORLDWIDE

Our 17" outdoor monitors with 1,000 nit screen brightness are found in a wide range of demanding industries. For example, military, law enforcement, aviation and entertainment have benefitted. They are also deployed in the inspection, marine, oil & gas, industrial and transportation industries. TRU-Vu monitors are backed by our full 3-Year Warranty. This ensures you of many years of reliable service.

We specifically design all *TRU-Vu* industrial LCD monitors for use in demanding applications. Every *TRU-Vu* monitor utilizes industrial-grade components. We provide high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty guarantees you of reliable worry-free operation and service to back it up.

## OUR LCD TECHNICAL EXPERTS ARE READY TO HELP YOU FIND THE BEST DISPLAY

With over 200 LCD monitors and touch screens on our site, selecting the ideal equipment, or touch screen solution may be a bit overwhelming. To help narrow-down the choices, check out our **Advanced Search Tool**. For example, this enables you filter by your own specific search requirements. See our full line-up of industrial-grade **Sunlight Readable and Daylight Readable** monitors and touch screens. This filters all of our monitors by high brightness features. Additionally, you'll find the sunlight readable touch screens in all the sizes and configurations available. View all **similar size monitors** or view only **waterproof displays**. TRU-Vu can provide modified or Custom OEM LCD Displays. Private Label Monitors are also an option if you have very specific requirements.

Finally, our team members are ready to help! We can determine the exact solution that will meet your specific needs. Certainly, TRU-Vu will help provide crystal-clear images for your operating requirements. Call (847) 259-2344 today to speak with one of our specialists. Above all, we will listen. It's one of the things we do best. Our professional advisors will ensure the monitor or touch screen you receive will be and do everything you had hoped it would!

If you prefer, fill out a **quick form** with your requirements, and we will guide you to the proper models that will work best.


## SPECIFICATIONS

	<b>SRMW-17Z-36</b>
LCD Panel	17" Color TN Panel; LED Backlights
Resolution	1280 x 1024 (SXGA)
Viewable Area	13.30" (W) x 10.64" (H) (337.9 x 270.3 mm)
Pixel Pitch	0.264mm
Display Colors	16.7 Million
Aspect Ratio	4:3 (5:4)
Brightness	1,000 nits
Front Glass	Anti- Reflective
Contrast Ratio	1,000:1
Dim-To-Black Function	Standard
Viewing Angle	160° (H) x 140° (V)
Response Time	30 msec Trf
Control	OSD (On-Screen Display) via Front Panel Pushbuttons
Video Inputs	VGA, HDMI, BNC Loop-thru, HD-SDI
Power Requirement	9-36 VDC with 2.5mm Locking Pigtail
Power Consumption	TBD
Enclosure	Stainless Steel
Enclosure Rating	NEMA 4X

	<b>SRMW-17Z-36</b>
Mounting	100x100mm Rear VESA Hole Pattern
Operating Temperature	-22° to +185°F (-30° to +85°C)
Humidity	5-90% RH
Shock	50 G (20 msec, ½ sine)
Vibration	1.5G RMS 10-200 HZ
Dimensions	16.25" (L) x 13.28" (W) x 3.20" (D) 412.90 x 337.30 x 81.40 mm
Weight	TBD
Warranty	3 Years

Note: Specifications subject to change without notice.

## DIMENSIONS (MM)

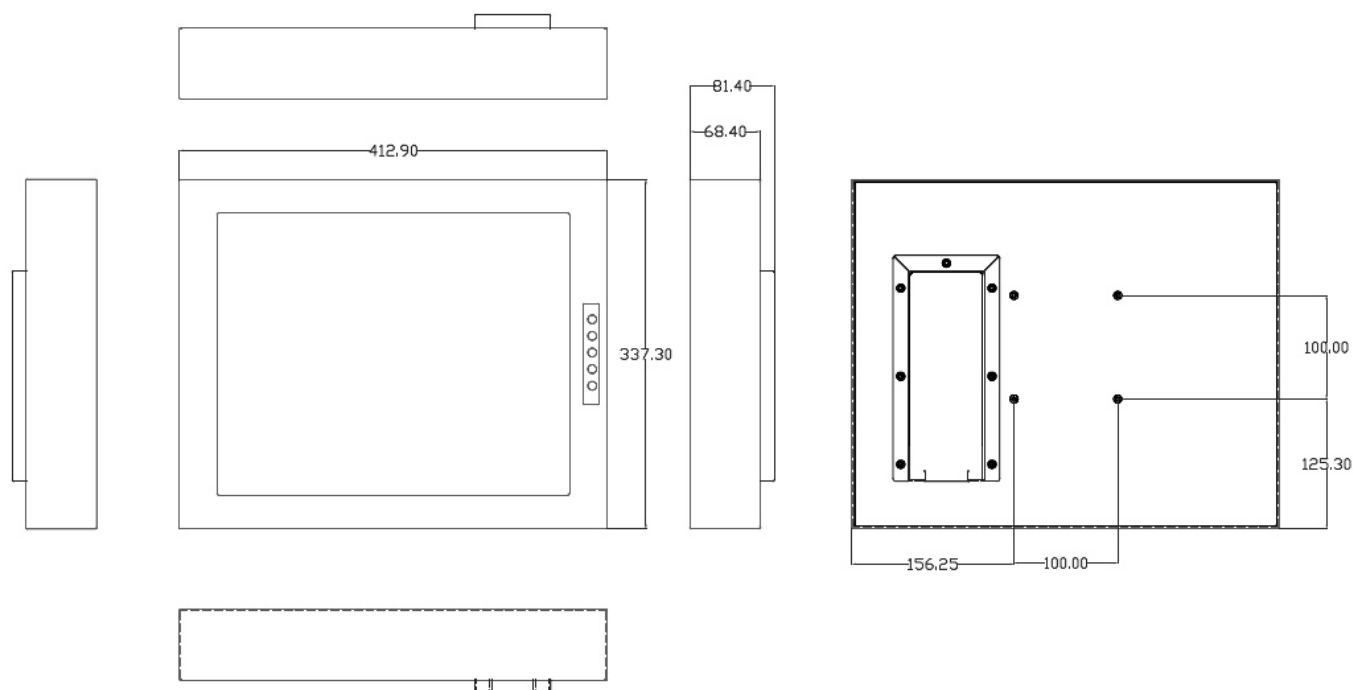

SRMW-17Z-36

## Standard Accessories:

- VGA Cable
- HDMI Cable
- 2.5mm Locking Pigtail

## Available Options:

- Panel Mount
- Open-Frame Configuration

- <li>Private Label</li>
- <li>Other Customer - Specific Modifications</li>
- <li><span class="s1">Rack Mount Bracket for 17"<span class="Apple-converted-space"> </span><a href="https://tru-vumonitors.com/products/mb-rack-17-and-mb-rack-19/" target="\_blank" rel="noopener">MB-Rack-17</a></span></li>
- <li>TableTop Base</li>

</ul>